

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

TFT-LCD

P0

2016.11.3

1

OF 33

**NV156FHM-N46****Preliminary Product Specification****Rev. P0**

HEFEI XINSHENG OPTOELECTRONICS TECHNOLOGY CO.,LTD

|                  |         |                                                               |  |           |                 |
|------------------|---------|---------------------------------------------------------------|--|-----------|-----------------|
| BOE              |         | PRODUCT GROUP                                                 |  | REV       | ISSUE DATE      |
|                  |         | TFT- LCD PRODUCT                                              |  | P0        | 2016.11.3       |
| SPEC. NUMBER     |         | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |  |           | PAGE<br>2 OF 33 |
| REVISION HISTORY |         |                                                               |  |           |                 |
| REV.             | ECN No. | DESCRIPTION OF CHANGES                                        |  | DATE      | PREPARED        |
| P0               | -       | Initial Release                                               |  | 2016.11.3 | 杨通              |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |
|                  |         |                                                               |  |           |                 |

|              |                                                               |     |                 |
|--------------|---------------------------------------------------------------|-----|-----------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE      |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3       |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>3 OF 33 |

Contents


| No.  | Items                                                | Page |
|------|------------------------------------------------------|------|
|      | REVISION HISTORY                                     | 2    |
|      | CONTENTS                                             | 3    |
| 1.0  | General Description                                  | 4    |
| 2.0  | Absolute Maximum ratings                             | 6    |
| 3.0  | Electrical specifications.                           | 7    |
| 4.0  | Optical specifications.                              | 10   |
| 5.0  | Interface Connection                                 | 15   |
| 6.0  | Signal Timing Specification                          | 18   |
| 7.0  | Input Signals, Display Colors & Gray Scale of Colors | 20   |
| 8.0  | Power Sequence                                       | 21   |
| 9.0  | Connector description                                | 22   |
| 10.0 | Mechanical Characteristics                           | 23   |
| 11.0 | Reliability Test                                     | 24   |
| 12.0 | Handling & Cautions.                                 | 24   |
| 13.0 | Label                                                | 25   |
| 14.0 | Packing information                                  | 27   |
| 15.0 | Mechanical Outline Dimension                         | 28   |
| 16.0 | EDID Table                                           | 30   |

|              |                                                               |     |                 |
|--------------|---------------------------------------------------------------|-----|-----------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE      |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3       |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>4 OF 33 |

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

NV156FHM-N46 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

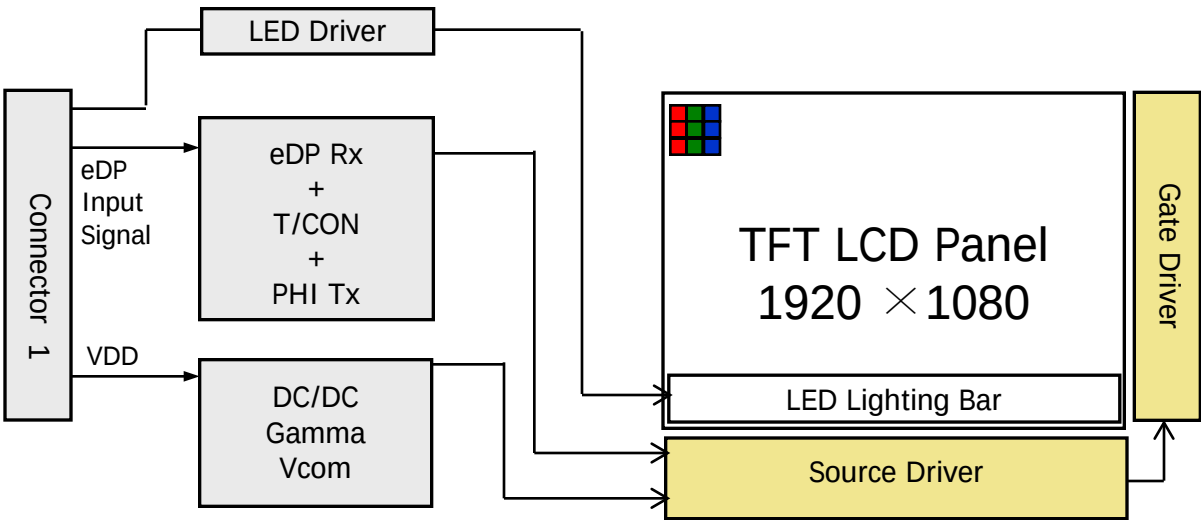

### 1.2 Features

- 2 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

|              |                                                               |     |                 |
|--------------|---------------------------------------------------------------|-----|-----------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE      |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3       |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>5 OF 33 |

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NV156FHM-N46. (listed in Table 1.)

<Table 1. General Specifications>

| Parameter           | Specification                            | Unit   | Remarks       |
|---------------------|------------------------------------------|--------|---------------|
| Active area         | 344.16 (H) ×193.59 (V)                   | mm     |               |
| Number of pixels    | 1920 (H) ×1080 (V)                       | pixels |               |
| Pixel pitch         | 0.17925 (H) X 0.17925 (V)                | mm     |               |
| Pixel arrangement   | RGB Vertical stripe                      |        |               |
| Display colors      | 262K                                     | colors |               |
| Display mode        | Normally Black                           |        |               |
| Dimensional outline | 359.5(H)*223.8(V) (W/PCB)*3.29(Max)      | mm     |               |
| Weight              | 380 (max)                                | g      |               |
| Surface treatment   | AG                                       |        |               |
| Back-light          | Lower Down side, 1-LED Lighting Bar type |        | Note 1        |
| Power consumption   | P <sub>D</sub> : 1.6 (max)               | W      | R/G/B Pattern |
|                     | P <sub>BL</sub> :3.5(max)                | W      |               |
|                     | P <sub>total</sub> :5.1 (max)            | W      | R/G/B Pattern |

Notes : 1. LED Lighting Bar (54\*LED Array)

|              |                                                               |     |                 |
|--------------|---------------------------------------------------------------|-----|-----------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE      |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3       |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>6 OF 33 |


2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings> Ta=25+/-2°C

| Parameter             | Symbol          | Min.                 | Max.                 | Unit | Remarks |
|-----------------------|-----------------|----------------------|----------------------|------|---------|
| Power Supply Voltage  | V <sub>DD</sub> | -0.3                 | 4.0                  | V    | Note 1  |
| Logic Supply Voltage  | V <sub>IN</sub> | V <sub>SS</sub> -0.3 | V <sub>DD</sub> +0.3 | V    |         |
| Operating Temperature | T <sub>OP</sub> | 0                    | +50                  | °C   | Note 2  |
| Storage Temperature   | T <sub>ST</sub> | -20                  | +60                  | °C   |         |

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.  
 95 % RH Max. ( 40 °C ≥ Ta)  
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

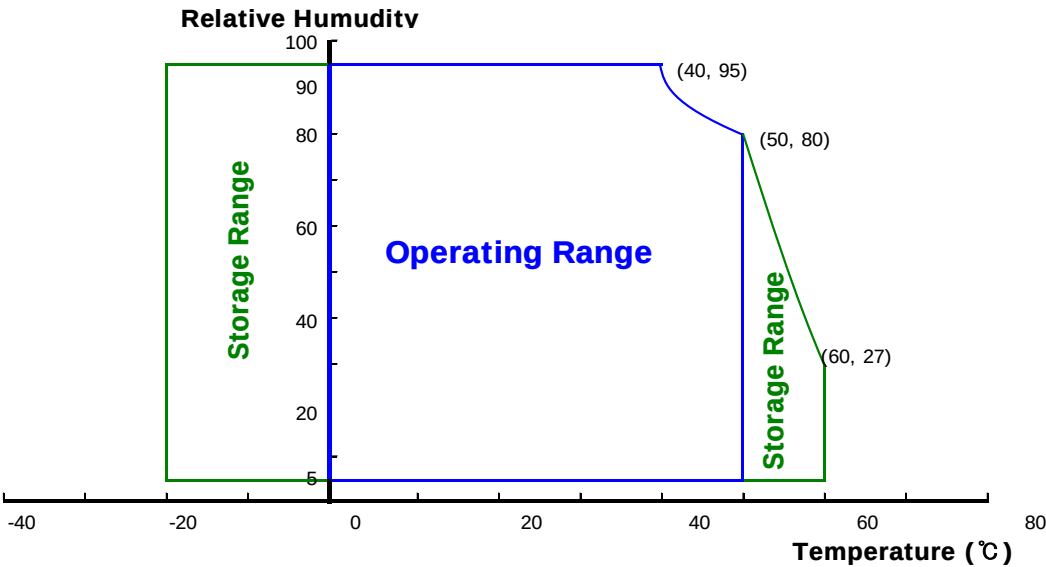

|                     |                                                                      |            |                        |
|---------------------|----------------------------------------------------------------------|------------|------------------------|
| <b>BOE</b>          | <b>PRODUCT GROUP</b>                                                 | <b>REV</b> | <b>ISSUE DATE</b>      |
|                     | TFT- LCD PRODUCT                                                     | P0         | 2016.11.3              |
| <b>SPEC. NUMBER</b> | <b>SPEC. TITLE</b><br>NV156FHM-N46 Preliminary Product Specification |            | <b>PAGE</b><br>7 OF 33 |

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 Electrical Specifications

< Table 3. Electrical specifications > Ta=25+/-2°C

| Parameter                        |                    | Min. | Typ. | Max. | Unit | Remarks                   |
|----------------------------------|--------------------|------|------|------|------|---------------------------|
| Power Supply Voltage             | V <sub>DD</sub>    | 3.0  | 3.3  | 3.6  | V    | Note 1                    |
| Permissible Input Ripple Voltage | V <sub>RF</sub>    | -    | -    | 100  | mV   | At V <sub>DD</sub> = 3.3V |
| Power Supply Current             | I <sub>DD</sub>    | -    | 303  | -    | mA   | Note 1                    |
| Differential Input Voltage       | V <sub>ID</sub>    | 200  | -    | 600  | mV   |                           |
| Power Consumption                | P <sub>D</sub>     | -    | -    | 1.6  | W    | Note 1                    |
|                                  | P <sub>BL</sub>    | -    | -    | 3.5  | W    | Note 2                    |
|                                  | P <sub>total</sub> | -    | -    | 5.1  | W    |                           |

- Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.  
The current draw and power consumption specified is for 3.3V at 25°C.  
Red, Green Or Blue Pattern
2. Calculated value for reference ( $V_{LED} \times I_{LED}$ )

|              |                                                               |  |     |                 |
|--------------|---------------------------------------------------------------|--|-----|-----------------|
| BOE          | PRODUCT GROUP                                                 |  | REV | ISSUE DATE      |
|              | TFT- LCD PRODUCT                                              |  | P0  | 2016.11.3       |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |  |     | PAGE<br>8 OF 33 |

### 3.2 Backlight Unit

< Table 4. LED Driving guideline specifications > Ta=25+/-2°C


| Parameter                           |                | Min.             | Typ.   | Max. | Unit   | Remarks |                       |
|-------------------------------------|----------------|------------------|--------|------|--------|---------|-----------------------|
| LED Forward Voltage                 |                | V <sub>F</sub>   | -      | -    | 3.0    | V       | -                     |
| LED Forward Current                 |                | I <sub>F</sub>   | -      | 19.0 | -      | mA      | -                     |
| LED Power Consumption               |                | P <sub>LED</sub> |        | -    | 3.5    | W       | Note 1                |
| LED Life-Time                       |                | N/A              | 15,000 | -    | -      | Hour    | I <sub>F</sub> = 20mA |
| Power supply voltage for LED Driver |                | V <sub>LED</sub> | 5      | 12   | 21     | V       |                       |
| EN Control Level                    | Backlight on   |                  | 2.5    |      | 5.0    | V       |                       |
|                                     | Backlight off  |                  | 0      |      | 1.0    | V       |                       |
| PWM Control Level                   | PWM High Level |                  | 2.5    |      | 5.0    | V       |                       |
|                                     | PWM Low Level  |                  | 0      |      | 0.1    | V       |                       |
| PWM Control Frequency               |                | F <sub>PWM</sub> | 100    | -    | 10,000 | Hz      |                       |
| Duty Ratio                          |                | -                | 1      | -    | 100    | %       | Note3                 |

- Notes : 1. Power supply voltage12V for LED Driver  
 Calculator Value for reference  $I_F \times V_F \times 54 / \text{efficiency} = P_{LED}$   
 2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.  
 3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.



|              |                                                               |     |                 |
|--------------|---------------------------------------------------------------|-----|-----------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE      |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3       |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>9 OF 33 |

3.3 LED structure

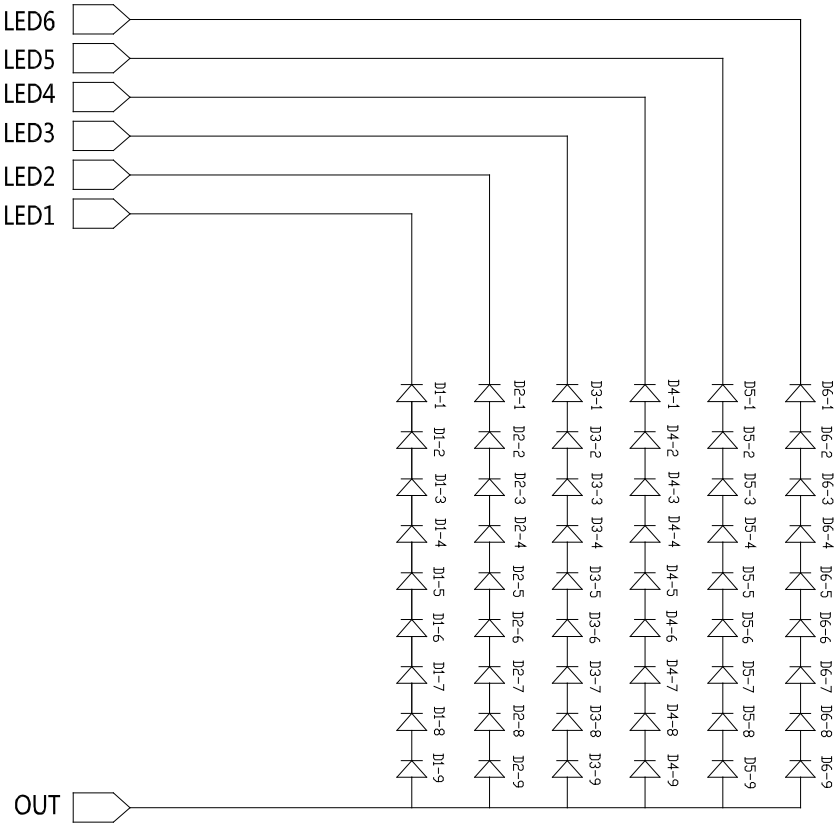

|              |                                                               |                  |            |
|--------------|---------------------------------------------------------------|------------------|------------|
| BOE          | PRODUCT GROUP                                                 | REV              | ISSUE DATE |
|              | TFT- LCD PRODUCT                                              | P0               | 2016.11.3  |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification | PAGE<br>10 OF 33 |            |

## 4.0 OPTICAL SPECIFICATION

### 4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25\pm 2^{\circ}\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^{\circ}$ . We refer to  $\theta\varnothing=0$  ( $=\theta_3$ ) as the 3 o'clock direction (the “right”),  $\theta\varnothing=90$  ( $=\theta_{12}$ ) as the 12 o'clock direction (“upward”),  $\theta\varnothing=180$  ( $=\theta_9$ ) as the 9 o'clock direction (“left”) and  $\theta\varnothing=270$ ( $=\theta_6$ ) as the 6 o'clock direction (“bottom”). While scanning  $\theta$ and/or  $\varnothing$ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at  $25^{\circ}\text{C}$ . Optimum viewing angle direction is 6 'clock.

### 4.2 Optical Specifications

<Table 5. Optical Specifications>

| Parameter                        |            | Symbol        | Condition                                | Min.  | Typ.  | Max.  | Unit              | Remark |
|----------------------------------|------------|---------------|------------------------------------------|-------|-------|-------|-------------------|--------|
| Viewing Angle range              | Horizontal | $\Theta_3$    | CR > 10                                  | -     | 85    | -     | Deg.              | Note 1 |
|                                  |            | $\Theta_9$    |                                          | -     | 85    | -     | Deg.              |        |
|                                  | Vertical   | $\Theta_{12}$ |                                          | -     | 85    | -     | Deg.              |        |
|                                  |            | $\Theta_6$    |                                          | -     | 85    | -     | Deg.              |        |
| Luminance Contrast ratio         |            | CR            | $\Theta = 0^\circ$                       | -     | 800   |       |                   | Note 2 |
| Luminance of White               | 5 Points   | $Y_w$         | $\Theta = 0^\circ$<br>$I_{LED} = 19.0mA$ | -     | 280   | -     | cd/m <sup>2</sup> | Note 3 |
| White Luminance uniformity       | 5 Points   | $\Delta Y5$   |                                          | 80    | -     | -     |                   | Note 4 |
|                                  | 13 Points  | $\Delta Y13$  |                                          | 65    | -     | -     |                   |        |
| White Chromaticity               |            | $x_w$         | $\Theta = 0^\circ$                       | 0.277 | 0.307 | 0.337 |                   | Note 5 |
|                                  |            | $y_w$         |                                          | 0.295 | 0.325 | 0.355 |                   |        |
| Reproduction of color            | Red        | $x_R$         | $\Theta = 0^\circ$                       | -0.03 | 0.598 | +0.03 |                   |        |
|                                  |            | $y_R$         |                                          |       | 0.355 |       |                   |        |
|                                  | Green      | $x_G$         |                                          |       | 0.326 |       |                   |        |
|                                  |            | $y_G$         |                                          |       | 0.568 |       |                   |        |
|                                  | Blue       | $x_B$         |                                          |       | 0.154 |       |                   |        |
|                                  |            | $y_B$         |                                          |       | 0.136 |       |                   |        |
| Gamut                            |            |               |                                          | 40    | 45    | 50    | %                 |        |
| Response Time (Rising + Falling) |            | $T_{RT}$      | Ta= 25° C<br>$\Theta = 0^\circ$          | -     | 30    | 35    | ms                | Note 6 |
| Cross Talk                       |            | CT            | $\Theta = 0^\circ$                       | -     | -     | 2.0   | %                 | Note 7 |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>11 OF 33 |

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of  $\Theta = 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$ .  
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark.  
(See FIGURE 5).

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>12 OF 33 |

4.3 Optical measurements

Figure 1. Measurement Set Up


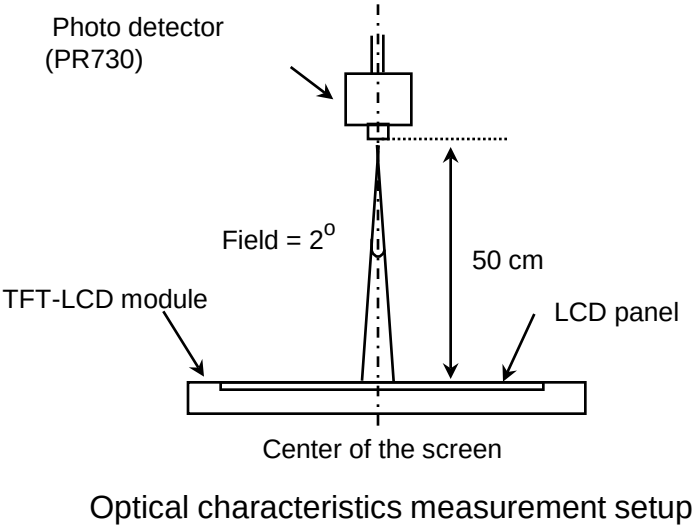



Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

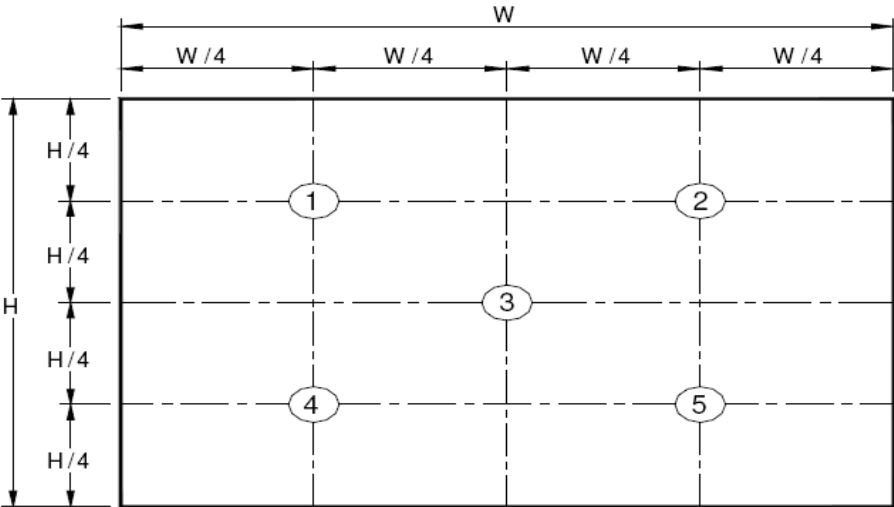

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>13 OF 33 |

**Figure 3. Uniformity Measurement Locations (13 points)**

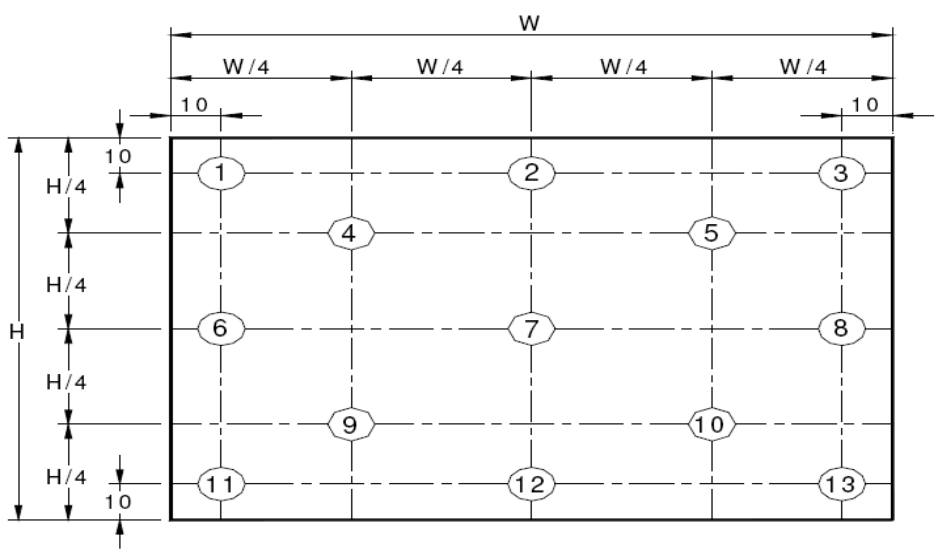

The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$  (see FIGURE 2) ,  $\Delta Y13 = \text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}$  (see FIGURE 3).


**Figure 4. Response Time Testing**

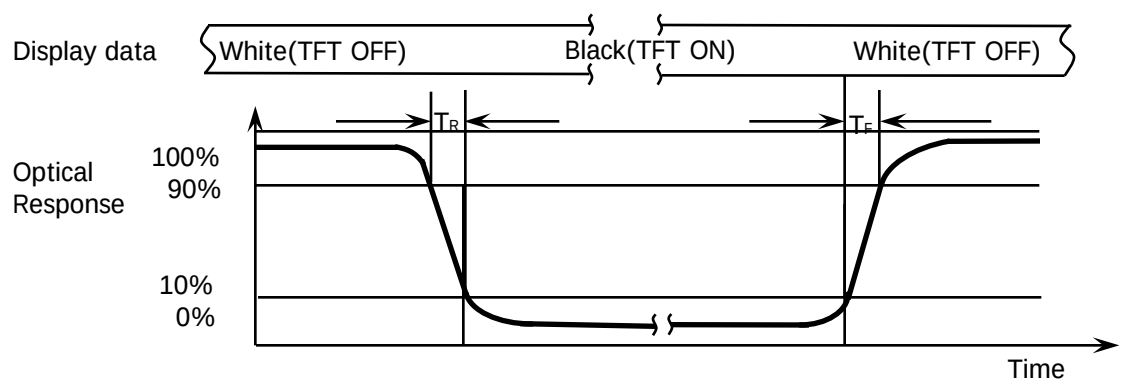

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td and 90% to 10% is Tr.

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>14 OF 33 |

**Figure 5. Cross Modulation Test Description**

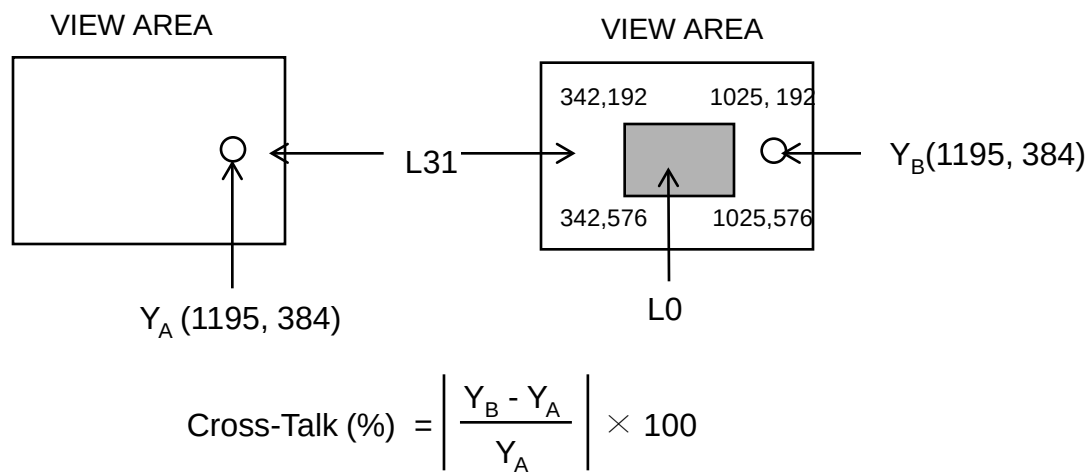

Where:

$Y_A$  = Initial luminance of measured area (cd/m<sup>2</sup>)

$Y_B$  = Subsequent luminance of measured area (cd/m<sup>2</sup>)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>15 OF 33 |

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection


The electronics interface connector is UJU IS050-L30B-C10 or Compatible.  
The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

| Terminal | Symbol        | Functions                   |
|----------|---------------|-----------------------------|
| Pin No.  | Symbol        | Description                 |
| 1        | CABC_ENABLE   | Test enable                 |
| 2        | H_GND         | Ground                      |
| 3        | LANE1_N       | eDP RX channel 1 negative   |
| 4        | LANE1_P       | eDP RX channel 1 positive   |
| 5        | H_GND         | Ground                      |
| 6        | LANE0_N       | eDP RX channel 0 negative   |
| 7        | LANE0_P       | eDP RX channel 0 positive   |
| 8        | H_GND         | Ground                      |
| 9        | AUX_CH_P      | eDP AUX CH positive         |
| 10       | AUX_CH_N      | eDP AUX CH negative         |
| 11       | H_GND         | Ground                      |
| 12       | LCD_VCC       | Power Supply, 3.3V (typ.)   |
| 13       | LCD_VCC       | Power Supply, 3.3V (typ.)   |
| 14       | LCD_Self_Test | Panel self test enable      |
| 15       | H_GND         | Ground                      |
| 16       | H_GND         | Ground                      |
| 17       | HPD           | Hot plug detect output      |
| 18       | BL_GND        | LED Ground                  |
| 19       | BL_GND        | LED Ground                  |
| 20       | BL_GND        | LED Ground                  |
| 21       | BL_GND        | LED Ground                  |
| 22       | BL_ENABLE     | LED enable pin(+3.3V Input) |
| 23       | BL_PWM        | System PWM Signal Input     |
| 24       | Hsync         | 预留Hsync，暂不开启                |
| 25       | NC            | No Connection               |
| 26       | BL_POWER      | LED Power Supply 5V-21V     |
| 27       | BL_POWER      | LED Power Supply 5V-21V     |
| 28       | BL_POWER      | LED Power Supply 5V-21V     |
| 29       | BL_POWER      | LED Power Supply 5V-21V     |
| 30       | COLOR_ENABLE  | Test enable                 |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>16 OF 33 |

5-2. eDP Interface

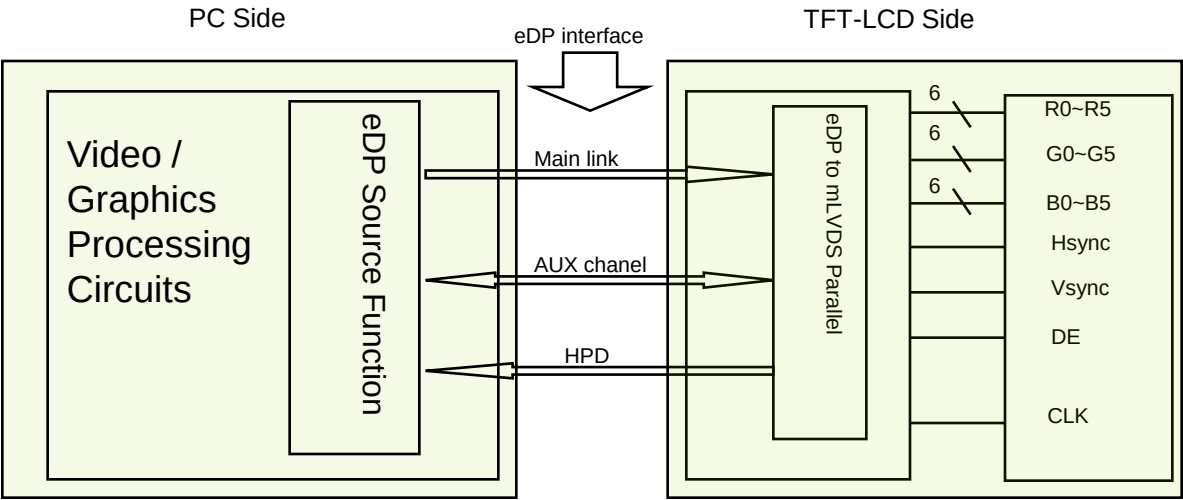

Note. Transmitter : NT71895QG or equivalent.  
 Transmitter is not contained in Module.

5.3.eDP Input signal

| Lane 0        | Lane 1        |
|---------------|---------------|
| R0-5:0 G0-5:4 | R1-5:0 G1-5:4 |
| G0-3:0 B0-5:2 | G1-3:0 B1-5:2 |
| B0-1:0 R2-5:0 | B1-1:0 R3-5:0 |
| G2-5:0 B2-5:4 | G3-5:0 B3-5:4 |
| B2-3:0 R4-5:2 | B3-3:0 R5-5:2 |
| R4-1:0 G4-5:0 | R5-1:0 G5-5:0 |
| B4-5:0 R6-5:4 | B5-5:0 R7-5:4 |
| R6-3:0 G6-5:2 | R7-3:0 G7-5:2 |
| R6-1:0 G6-5:0 | R7-1:0 G7-5:0 |



|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>17 OF 33 |

5.4 Back-light & LCM Interface Connection

Interface Connector: CRT F10401-1092

<Table 7. Pin Assignments for the BLU & LCM Connector>

| Pin No. | Symbol | Description            | Pin No. | Symbol | Description            |
|---------|--------|------------------------|---------|--------|------------------------|
| 1       | LED1   | LED cathode connection | 6       | LED6   | LED cathode connection |
| 2       | LED2   | LED cathode connection | 7       | NC     | No Connection          |
| 3       | LED3   | LED cathode connection | 8       | Vout   | LED anode connection   |
| 4       | LED4   | LED cathode connection | 9       | Vout   | LED anode connection   |
| 5       | LED5   | LED cathode connection | 10      | Vout   | LED anode connection   |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>18 OF 33 |

## 6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV156FHM-N46 is operated by the DE only.

| Item                      |           | Symbols | Min  | Typ   | Max  | Unit   |
|---------------------------|-----------|---------|------|-------|------|--------|
| Clock                     | Frequency | 1/Tc    | 100  | 141.4 | 160  | MHz    |
|                           | High Time | Tch     | -    | 4/7   | -    | Tc     |
|                           | Low Time  | Td      | -    | 3/7   | -    | Tc     |
| Frame Period              |           | Tv      | 1090 | 1100  | 1238 | lines  |
|                           |           |         | -    | 60    | -    | Hz     |
|                           |           |         | -    | 16.7  | -    | ms     |
| Vertical Display Period   |           | Tvd     | -    | 1080  | -    | lines  |
| One line Scanning Period  |           | Th      | 2080 | 2142  | 2400 | clocks |
| Horizontal Display Period |           | Thd     | -    | 1920  | -    | clocks |

Note※: This Module can support low frame refresh rate 50Hz & 40Hz.


|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>19 OF 33 |

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 8. eDP Rx Interface Timing Specification>

| Item                                                                            | Symbol              | Min | Typ | Max  | Unit | Remark |
|---------------------------------------------------------------------------------|---------------------|-----|-----|------|------|--------|
| Spread spectrum clock                                                           | SSC                 |     | 0.5 |      | %    |        |
| Differential peak-to-peak input voltage at package pins                         | VRX-DIFFp-p         | 100 | 0   | 1320 | mV   |        |
| Rx input DC common mode voltage                                                 | VRX_DC_CM           | -   | GND | -    | V    |        |
| Differential termination resistance                                             | RRX-DIFF            | 80  | -   | 100  | Ω    |        |
| Single-ended termination resistance                                             | RRX-SE              | 40  | -   | 60   | Ω    |        |
| Rx short circuit current limit                                                  | IRX_SHORT           | -   | -   | 20   | mA   |        |
| Intra-pair skew at Rx package pins (HBR)<br>RX intra-pair skew tolerance at HBR | LRX_SKEW_INTRA_PAIR | -   | -   | 150  | ps   |        |

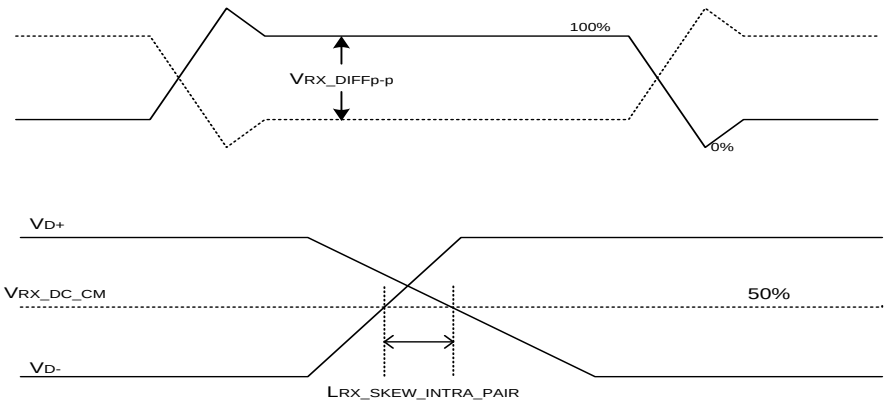

|                     |                                                                      |            |                         |
|---------------------|----------------------------------------------------------------------|------------|-------------------------|
| <b>BOE</b>          | <b>PRODUCT GROUP</b>                                                 | <b>REV</b> | <b>ISSUE DATE</b>       |
|                     | TFT- LCD PRODUCT                                                     | P0         | 2016.11.3               |
| <b>SPEC. NUMBER</b> | <b>SPEC. TITLE</b><br>NV156FHM-N46 Preliminary Product Specification |            | <b>PAGE</b><br>20 OF 33 |


## 7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

|                    | Colors &<br>Gray scale      | Data signal |    |    |    |    |    |        |    |    |    |    |    |        |    |    |    |    |    |
|--------------------|-----------------------------|-------------|----|----|----|----|----|--------|----|----|----|----|----|--------|----|----|----|----|----|
|                    |                             | R0          | R1 | R2 | R3 | R4 | R5 | G0     | G1 | G2 | G3 | G4 | G5 | B0     | B1 | B2 | B3 | B4 | B5 |
| Basic colors       | Black                       | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | Blue                        | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 1      | 1  | 1  | 1  | 1  | 1  |
|                    | Green                       | 0           | 0  | 0  | 0  | 0  | 0  | 1      | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | Light Blue                  | 0           | 0  | 0  | 0  | 0  | 0  | 1      | 1  | 1  | 1  | 1  | 1  | 1      | 1  | 1  | 1  | 1  | 1  |
|                    | Red                         | 1           | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | Purple                      | 1           | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  | 1      | 1  | 1  | 1  | 1  | 1  |
|                    | Yellow                      | 1           | 1  | 1  | 1  | 1  | 1  | 1      | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | White                       | 1           | 1  | 1  | 1  | 1  | 1  | 1      | 1  | 1  | 1  | 1  | 1  | 1      | 1  | 1  | 1  | 1  | 1  |
| Gray scale of Red  | Black                       | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | △                           | 1           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | Darker                      | 0           | 1  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | △<br>▽                      | ↑<br>↓      |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    |
|                    | Brighter                    | 1           | 0  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | ▽                           | 0           | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | Red                         | 1           | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | Gray scale of Green         | Black       | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
| △                  |                             | 0           | 0  | 0  | 0  | 0  | 0  | 1      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
| Darker             |                             | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 1  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
| △<br>▽             |                             | ↑<br>↓      |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    |
| Brighter           |                             | 0           | 0  | 0  | 0  | 0  | 0  | 1      | 0  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  |
| ▽                  |                             | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  |
| Green              |                             | 0           | 0  | 0  | 0  | 0  | 0  | 1      | 1  | 1  | 1  | 1  | 1  | 0      | 0  | 0  | 0  | 0  | 0  |
| Gray scale of Blue |                             | Black       | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
|                    | △                           | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 1      | 0  | 0  | 0  | 0  | 0  |
|                    | Darker                      | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 1  | 0  | 0  | 0  | 0  |
|                    | △<br>▽                      | ↑<br>↓      |    |    |    |    |    | ↓<br>↑ |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    |
|                    | Brighter                    | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 1      | 0  | 1  | 1  | 1  | 1  |
|                    | ▽                           | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 1  | 1  | 1  | 1  | 1  |
|                    | Blue                        | 0           | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 1      | 1  | 1  | 1  | 1  | 1  |
|                    | Gray scale of White & Black | Black       | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  | 0      | 0  | 0  | 0  | 0  | 0  |
| △                  |                             | 1           | 0  | 0  | 0  | 0  | 0  | 1      | 0  | 0  | 0  | 0  | 0  | 1      | 0  | 0  | 0  | 0  | 0  |
| Darker             |                             | 0           | 1  | 0  | 0  | 0  | 0  | 0      | 1  | 0  | 0  | 0  | 0  | 0      | 1  | 0  | 0  | 0  | 0  |
| △<br>▽             |                             | ↑<br>↓      |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    | ↑<br>↓ |    |    |    |    |    |
| Brighter           |                             | 1           | 0  | 1  | 1  | 1  | 1  | 1      | 0  | 1  | 1  | 1  | 1  | 1      | 0  | 1  | 1  | 1  | 1  |
| ▽                  |                             | 0           | 1  | 1  | 1  | 1  | 1  | 0      | 1  | 1  | 1  | 1  | 1  | 0      | 1  | 1  | 1  | 1  | 1  |
| White              |                             | 1           | 1  | 1  | 1  | 1  | 1  | 1      | 1  | 1  | 1  | 1  | 1  | 1      | 1  | 1  | 1  | 1  | 1  |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>21 OF 33 |

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

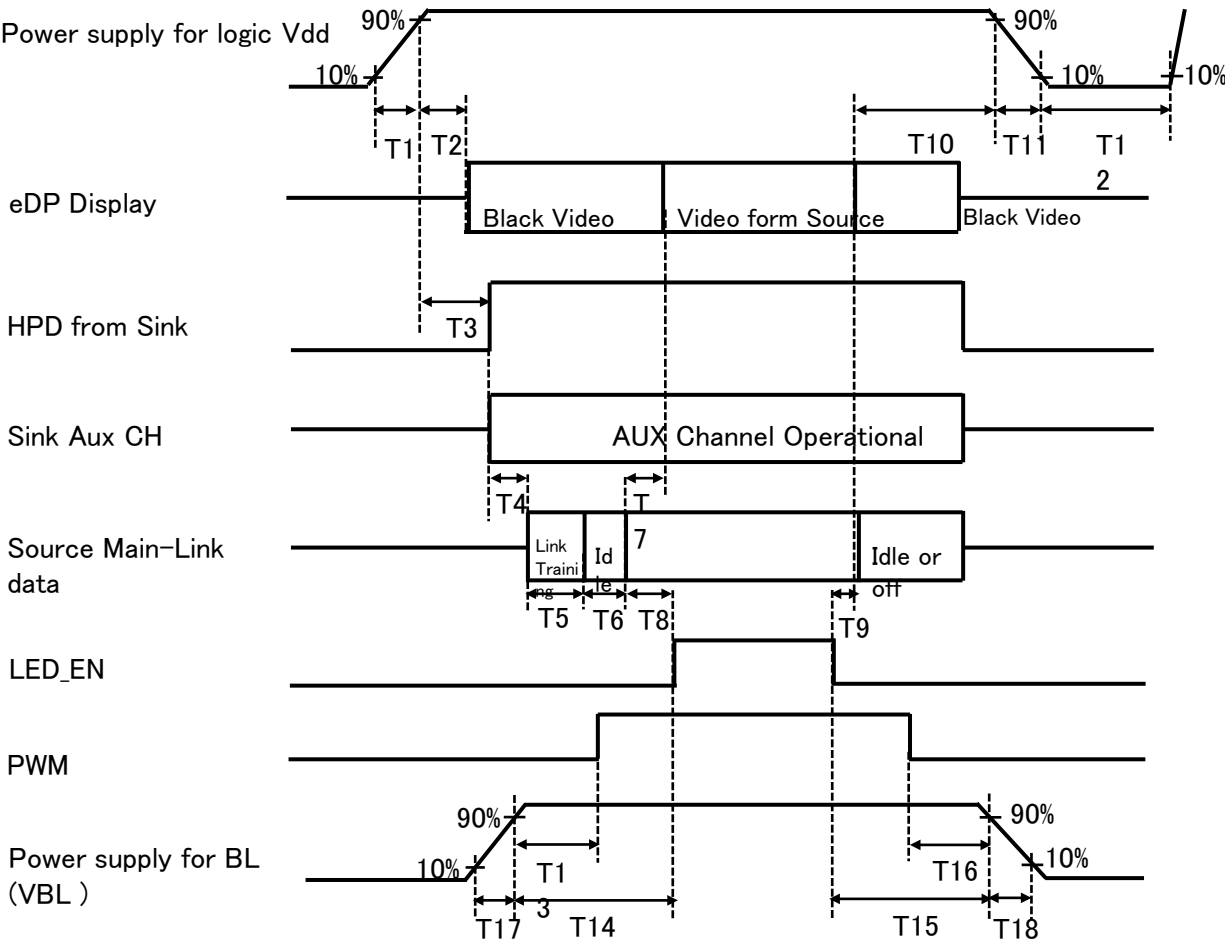

- 0.5ms ≤ T1 ≤ 10 ms
  - 0ms ≤ T2 ≤ 200 ms
  - 0ms ≤ T3 ≤ 200 ms
  - 0ms ≤ T13
  - 0ms ≤ T14
  - 0ms ≤ T17
- 0ms ≤ T7 ≤ 50ms
  - 0ms ≤ T10 ≤ 500 ms
  - 0 ms ≤ T11 ≤ 10 ms
  - 150ms ≤ T12
  - 0ms ≤ T15
  - 0ms ≤ T16
  - 0ms ≤ T18

Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>22 OF 33 |

9.0 Connector Description

Physical interface is described as for the connector on LCM.  
These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

| Connector Name /Description | For Signal Connector           |
|-----------------------------|--------------------------------|
| Manufacturer                | UJU or Compatible              |
| Type/ Part Number           | IS050-L30B-C10 or Compatible   |
| Mating housing/ Part Number | I-PEX 20454-030T or Compatible |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>23 OF 33 |

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NV156FHM-N46.  
Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

| Parameter           | Specification                                  | Unit |
|---------------------|------------------------------------------------|------|
| Active Area         | 344.16 (H) × 193.59(V)                         |      |
| Number of pixels    | 1920 (H) X 1080 (V) (1 pixel = R + G + B dots) |      |
| Pixel pitch         | 0.17925 (H) X 0.17925 (V)                      | mm   |
| Pixel arrangement   | RGB Vertical stripe                            |      |
| Display colors      | 262K                                           |      |
| Display mode        | Normally Black                                 |      |
| Dimensional outline | 359.5(H)*223.8(V) (W/PCB)*3.29(Max)            | mm   |
| Weight              | 380(Max)                                       | gram |
| Back Light          | Connector :CRT F10401-1092                     |      |
|                     | LED, Horizontal-LED Array type                 |      |

10.2 Mounting

See FIGURE 6.

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an Anti-Glare coating to minimize reflection and a coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

|                     |                                                                      |                         |                   |
|---------------------|----------------------------------------------------------------------|-------------------------|-------------------|
| <b>BOE</b>          | <b>PRODUCT GROUP</b>                                                 | <b>REV</b>              | <b>ISSUE DATE</b> |
|                     | TFT- LCD PRODUCT                                                     | P0                      | 2016.11.3         |
| <b>SPEC. NUMBER</b> | <b>SPEC. TITLE</b><br>NV156FHM-N46 Preliminary Product Specification | <b>PAGE</b><br>24 OF 33 |                   |

## 11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

| No | Test Items                                      | Conditions                                                                             |
|----|-------------------------------------------------|----------------------------------------------------------------------------------------|
| 1  | High temperature storage test                   | Ta = 60 °C, 240 hrs                                                                    |
| 2  | Low temperature storage test                    | Ta = -20 °C, 240 hrs                                                                   |
| 3  | High temperature & high humidity operation test | 1. Ta = 50 °C, 80%RH, 240 hr<br>2. Ta = 60 °C, 90%RH, 96 hr                            |
| 4  | High temperature & high humidity storage test   | 1. Ta = 85 °C, 85%RH, 168 hr                                                           |
| 5  | High temperature operation test                 | Ta = 60 °C, 240 hrs                                                                    |
| 6  | Low temperature operation test                  | Ta = 0 °C, 240 hrs<br>Ta = -20 °C, 24 hrs                                              |
| 7  | Thermal shock                                   | 1. Ta = -30 °C ↔ 70 °C (0.5 hr), 20 cycle<br>2. Ta = -40 °C ↔ 85 °C (0.5 hr), 20 cycle |
| 8  | Vibration test<br>(non-operating)               | 1.5G, 10~300Hz, Half Sine<br>X,Y,Z / Sweep rate : 1 hour                               |
| 9  | Shock test<br>(non-operating)                   | 220G, Half Sine Wave 2msec<br>± X, ± Y, ± Z Once for each direction                    |
| 10 | Electro-static discharge test<br>(operating)    | Air : 150 pF, 330Ω, 15 KV<br>Contact : 150 pF, 330Ω, 8 KV                              |
| 11 | ALT                                             | A Type -10°C~65°C, 0%~93%, 10Cycle                                                     |

## 12.0 HANDLING & CAUTIONS

### (1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

### (2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

### (3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.




|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>25 OF 33 |

- (4) Cautions for the atmosphere
- Dew drop atmosphere should be avoided.
  - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
- Do not apply fixed pattern data signal to the LCD module at product aging.
  - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
- Do not disassemble and/or re-assemble LCD module.
  - Do not re-adjust variable resistor or switch etc.
  - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) MDL label

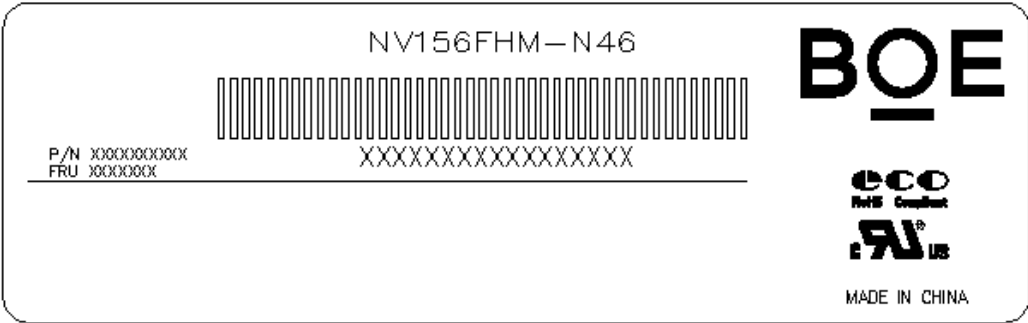

Module ID Naming Rule:

| Digit       | 1               | 2 | 3     | 4    | 5    | 6 | 7     | 8                                            | 9 | 10 | 11 | 12                     | 13 | 14 | 15 | 16 | 17 |
|-------------|-----------------|---|-------|------|------|---|-------|----------------------------------------------|---|----|----|------------------------|----|----|----|----|----|
| Code        | S               | L | S     | 5    | 1    | 2 | 3     | 5                                            | 9 | 4  | 2  | 0                      | 0  | 0  | 1  | D  | B  |
| Description | Model Code /GBN |   | Grade | Line | Year |   | Month | Model Extension Code (Last 4 Digits Of FGCD) |   |    |    | Serial No 00001-ZZZZZZ |    |    |    |    |    |

|              |                                                               |                  |            |
|--------------|---------------------------------------------------------------|------------------|------------|
| BOE          | PRODUCT GROUP                                                 | REV              | ISSUE DATE |
|              | TFT- LCD PRODUCT                                              | P0               | 2016.11.3  |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification | PAGE<br>26 OF 33 |            |

## (2) High voltage caution label

|                                                                                   |                                                                              |                                                                                                                                                       |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | HIGH VOLTAGE<br>CAUTION                                                      | COLD CATHODE FLUORESCENT LAMP IN LCD<br>PANEL CONTAINS A SMALL AMOUNT<br>OF MERCURY. PLEASE FOLLOW LOCAL OR-<br>DINANCES OR REGULATIONS FOR DISPOSAL. |
|                                                                                   | RISK OF ELECTRIC SHOCK,<br>DISCONNECT THE ELECTRIC<br>POWER BEFORE SERVICING |                                                                                                                                                       |

## (3) Box label

Label Size: 110 mm (L) × 55 mm (W)

Contents

Model: NV156FHM-N46

Q`ty: Module Q`ty in one box

Serial No.: Box Serial No.

Date: Packing Date

Internal use of Product


| HF XINSHENG OPTOELECTRONICS TECHNOLOGY Co., LTD |               |  |  |  |   |       |            |   |       |  |   |      |  |
|-------------------------------------------------|---------------|--|--|--|---|-------|------------|---|-------|--|---|------|--|
| MODEL:                                          | XXXXXXXX-XXX  |  |  |  | ① | Q'TY: | XX         |   | ②     |  |   |      |  |
| SERIAL NO:                                      | XXXXXXXXXXXXX |  |  |  | ③ | DATE: | XXXX/XX/XX |   | ④     |  |   |      |  |
| <div>Box ID bar code</div>                      |               |  |  |  |   |       |            |   |       |  |   |      |  |
| XXXX-XXXXXX                                     |               |  |  |  | ⑤ | XXXX  |            | ⑥ | XXXXX |  | ⑦ | (QA) |  |

| Digit<br>Code | 1            | 2 | 3     | 4    | 5    | 6 | 7     | 8                    | 9        | 10 | 11 | 12 | 13 |
|---------------|--------------|---|-------|------|------|---|-------|----------------------|----------|----|----|----|----|
| Code          | S            | L | S     | 5    | 1    | 2 | 3     | D                    | 0        | 0  | 0  | 6  | 8  |
| Description   | Products GBN |   | Grade | Line | Year |   | Month | Revisio<br>n<br>Code | SerialNo |    |    |    |    |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>27 OF 33 |

15.0 PACKING INFORMATION

15.1 Packing order

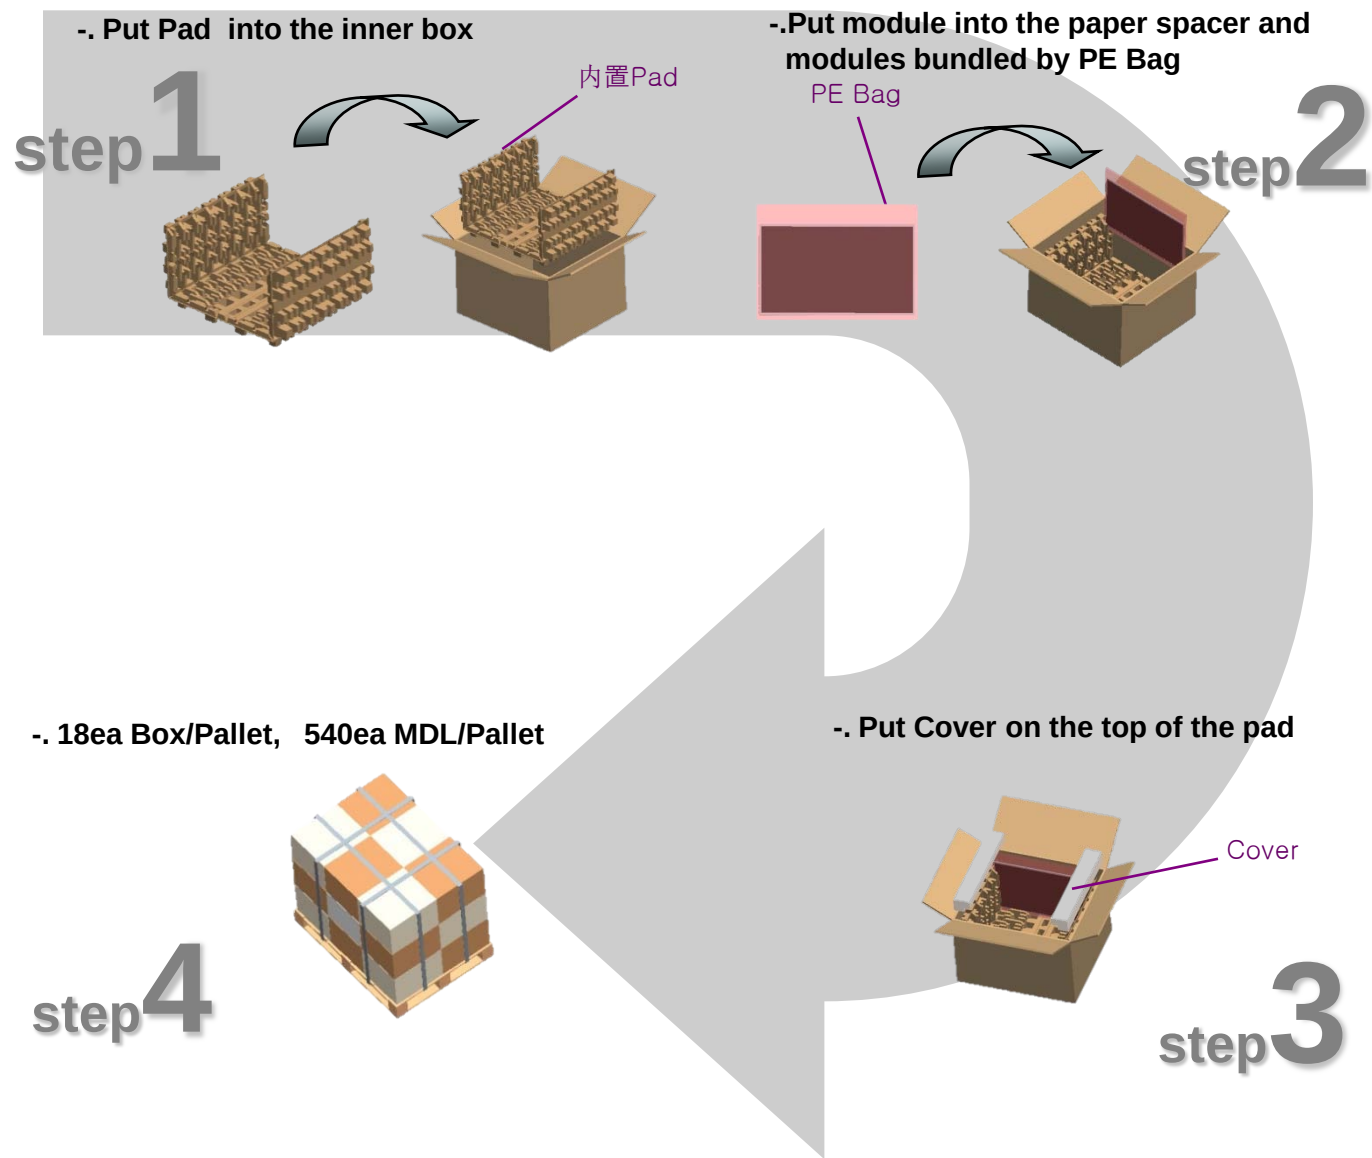


15.2 Notes

- Box Dimension: 428mm×373mm×288mm
- Package Quantity in one Box:30 pcs
- Total Weight: 13.66kg/Box



|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>29 OF 33 |

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

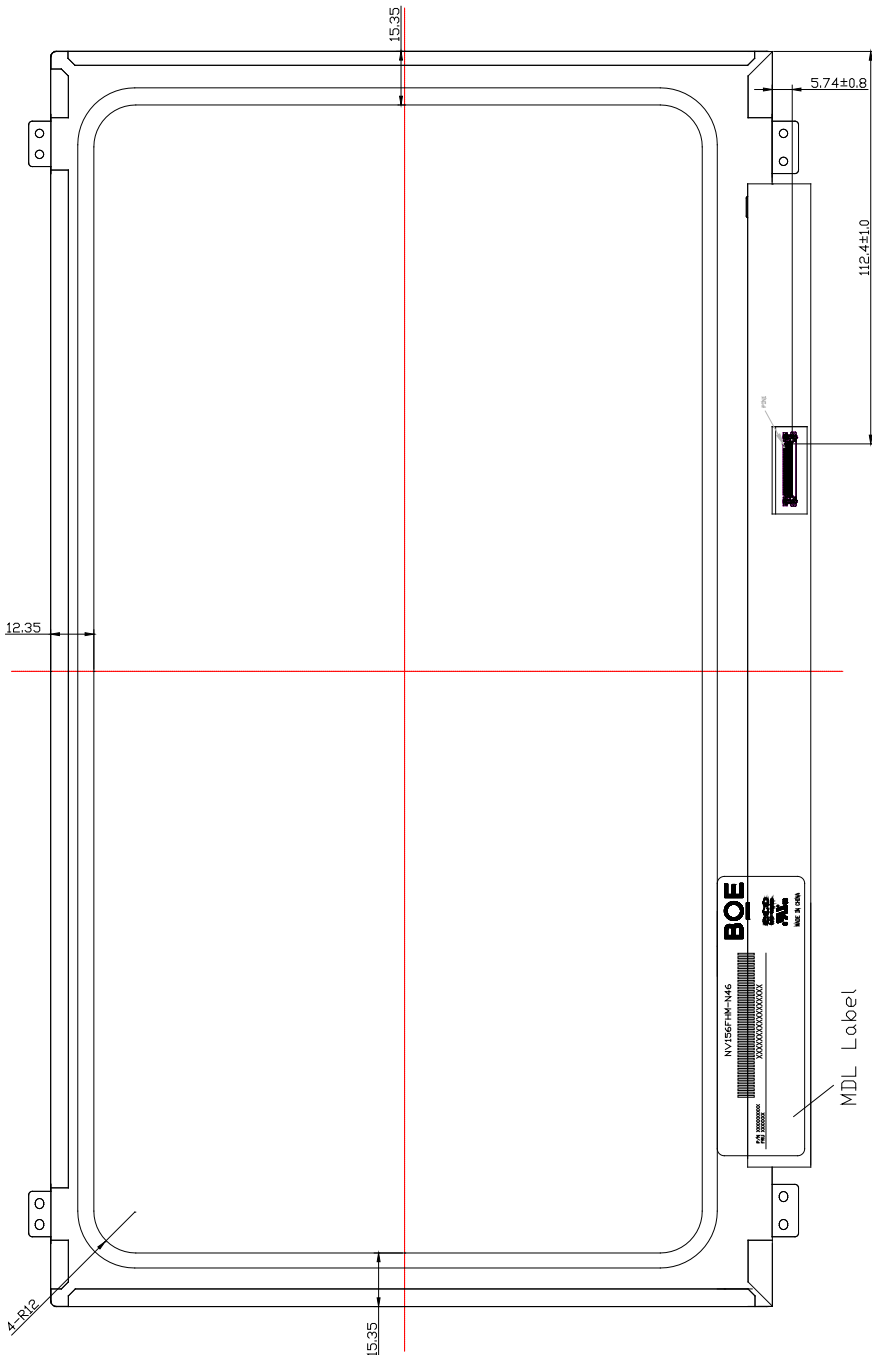

|                     |                                                                      |            |                         |
|---------------------|----------------------------------------------------------------------|------------|-------------------------|
| <b>BOE</b>          | <b>PRODUCT GROUP</b>                                                 | <b>REV</b> | <b>ISSUE DATE</b>       |
|                     | TFT- LCD PRODUCT                                                     | P0         | 2016.11.3               |
| <b>SPEC. NUMBER</b> | <b>SPEC. TITLE</b><br>NV156FHM-N46 Preliminary Product Specification |            | <b>PAGE</b><br>30 OF 33 |

17.0 EDID Table

| Address (HEX) | Function               | Hex | Dec | crc | Input values. | Notes                                         |
|---------------|------------------------|-----|-----|-----|---------------|-----------------------------------------------|
| 00            | Header                 | 00  | 0   |     | 0             | EDID Header                                   |
| 01            |                        | FF  | 255 |     | 255           |                                               |
| 02            |                        | FF  | 255 |     | 255           |                                               |
| 03            |                        | FF  | 255 |     | 255           |                                               |
| 04            |                        | FF  | 255 |     | 255           |                                               |
| 05            |                        | FF  | 255 |     | 255           |                                               |
| 06            |                        | FF  | 255 |     | 255           |                                               |
| 07            |                        | 00  | 0   |     | 0             |                                               |
| 08            | ID Manufacturer Name   | 09  | 9   |     | BOE           | ID = BOE                                      |
| 09            |                        | E5  | 229 |     |               |                                               |
| 0A            | ID Product Code        | B9  | 185 |     | 1721          | ID = 1721                                     |
| 0B            |                        | 06  | 6   |     |               |                                               |
| 0C            | 32-bit serial No.      | 00  | 0   |     |               |                                               |
| 0D            |                        | 00  | 0   |     |               |                                               |
| 0E            |                        | 00  | 0   |     |               |                                               |
| 0F            |                        | 00  | 0   |     |               |                                               |
| 10            | Week of manufacture    | 01  | 1   |     | 1             |                                               |
| 11            | Year of Manufacture    | 1A  | 26  |     | 2016          | Manufactured in 2016                          |
| 12            | EDID Structure Ver.    | 01  | 1   |     | 1             | EDID Ver 1.0                                  |
| 13            | EDID revision #        | 04  | 4   |     | 4             | EDID Rev. 0.4                                 |
| 14            | Video input definition | 95  | 149 |     | -             | digital signal/DP input                       |
| 15            | Max H image size       | 22  | 34  |     | 34            | 34 cm (Approx)                                |
| 16            | Max V image size       | 13  | 19  |     | 19            | 19 cm (Approx)                                |
| 17            | Display Gamma          | 78  | 120 |     | 2.2           | Gamma curve = 2.2                             |
| 18            | Feature support        | 02  | 2   |     |               | RGB display, Preferred Timming mode/RGB 4:4:4 |
| 19            | Red/Green low bits     | 3D  | 61  |     | -             | Red / Green Low Bits                          |
| 1A            | Blue/White low bits    | 78  | 120 |     | -             | Blue / White Low Bits                         |
| 1B            | Red x high bits        | 99  | 153 | 612 | 0.598         | Red (x) = 10011001 (0.598)                    |
| 1C            | Red y high bits        | 5B  | 91  | 363 | 0.355         | Red (y) = 01011011 (0.355)                    |
| 1D            | Green x high bits      | 54  | 84  | 335 | 0.328         | Green (x) = 01010100 (0.328)                  |
| 1E            | Green y high bits      | 91  | 145 | 581 | 0.568         | Green (y) = 10010001 (0.568)                  |
| 1F            | Blue x high bits       | 27  | 39  | 157 | 0.154         | Blue (x) = 00100111 (0.154)                   |
| 20            | BLue y high bits       | 22  | 34  | 139 | 0.136         | Blue (y) = 00100010 (0.136)                   |
| 21            | White x high bits      | 4E  | 78  | 314 | 0.307         | White (x) = 01001110 (0.307)                  |
| 22            | White y high bits      | 53  | 83  | 332 | 0.325         | White (y) = 01010011 (0.325)                  |
| 23            | Established timing 1   | 00  | 0   |     | -             |                                               |
| 24            | Established timing 2   | 00  | 0   |     | -             |                                               |

|              |                                                               |  |     |                  |
|--------------|---------------------------------------------------------------|--|-----|------------------|
| BOE          | PRODUCT GROUP                                                 |  | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              |  | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |  |     | PAGE<br>31 OF 33 |

| Address (HEX) | Function                              | Hex | Dec | crc | Input values. | Notes                                               |
|---------------|---------------------------------------|-----|-----|-----|---------------|-----------------------------------------------------|
| 25            | Established timing 3                  | 00  | 0   |     | -             |                                                     |
| 26            | Standard timing #1                    | 01  | 1   |     |               | Not Used                                            |
| 27            |                                       | 01  | 1   |     |               |                                                     |
| 28            | Standard timing #2                    | 01  | 1   |     |               | Not Used                                            |
| 29            |                                       | 01  | 1   |     |               |                                                     |
| 2A            | Standard timing #3                    | 01  | 1   |     |               | Not Used                                            |
| 2B            |                                       | 01  | 1   |     |               |                                                     |
| 2C            | Standard timing #4                    | 01  | 1   |     |               | Not Used                                            |
| 2D            |                                       | 01  | 1   |     |               |                                                     |
| 2E            | Standard timing #5                    | 01  | 1   |     |               | Not Used                                            |
| 2F            |                                       | 01  | 1   |     |               |                                                     |
| 30            | Standard timing #6                    | 01  | 1   |     |               | Not Used                                            |
| 31            |                                       | 01  | 1   |     |               |                                                     |
| 32            | Standard timing #7                    | 01  | 1   |     |               | Not Used                                            |
| 33            |                                       | 01  | 1   |     |               |                                                     |
| 34            | Standard timing #8                    | 01  | 1   |     |               | Not Used                                            |
| 35            |                                       | 01  | 1   |     |               |                                                     |
| 36            | Detailed timing/monitor descriptor #1 | 3C  | 60  |     | 141.4         | 141.4MHz Main clock                                 |
| 37            |                                       | 37  | 55  |     |               |                                                     |
| 38            |                                       | 80  | 128 |     | 1920          | Hor Active = 1920                                   |
| 39            |                                       | DE  | 222 |     | 222           | Hor Blanking = 222                                  |
| 3A            |                                       | 70  | 112 |     | -             | 4 bits of Hor. Active + 4 bits of Hor. Blanking     |
| 3B            |                                       | 38  | 56  |     | 1080          | Ver Active = 1080                                   |
| 3C            |                                       | 14  | 20  |     | 20            | Ver Blanking = 20                                   |
| 3D            |                                       | 40  | 64  |     | -             | 4 bits of Ver. Active + 4 bits of Ver. Blanking     |
| 3E            |                                       | 30  | 48  |     | 48            | Hor Sync Offset = 48                                |
| 3F            |                                       | 20  | 32  |     | 32            | H Sync Pulse Width = 32                             |
| 40            |                                       | 36  | 54  |     | 3             | V sync Offset = 3 line                              |
| 41            |                                       | 00  | 0   |     | 6             | V Sync Pulse width : 6 line                         |
| 42            |                                       | 58  | 88  |     | 344           | Horizontal Image Size = 344 mm (Low 8 bits)         |
| 43            |                                       | C2  | 194 |     | 194           | Vertical Image Size = 194 mm (Low 8 bits)           |
| 44            |                                       | 10  | 16  |     | -             | 4 bits of Hor Image Size + 4 bits of Ver Image Size |
| 45            |                                       | 00  | 0   |     | 0             | Hor Border (pixels)                                 |
| 46            |                                       | 00  | 0   |     | 0             | Vertical Border (Lines)                             |
| 47            |                                       | 1A  | 26  |     |               | Refer to right table                                |

|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>32 OF 33 |

| Address (HEX) | Function                              | Hex | Dec | crc | Input values. | Notes                                               |
|---------------|---------------------------------------|-----|-----|-----|---------------|-----------------------------------------------------|
| 48            | Detailed timing/monitor descriptor #2 | 00  | 0   |     | 0.0           | 0MHz Main clock                                     |
| 49            |                                       | 00  | 0   |     |               |                                                     |
| 4A            |                                       | 00  | 0   |     | 0             | Hor Active = 0                                      |
| 4B            |                                       | 00  | 0   |     | 0             | Hor Blanking = 0                                    |
| 4C            |                                       | 00  | 0   |     | -             | 4 bits of Hor. Active + 4 bits of Hor. Blanking     |
| 4D            |                                       | 00  | 0   |     | 0             | Ver Active = 768                                    |
| 4E            |                                       | 00  | 0   |     | 0             | Ver Blanking = 0                                    |
| 4F            |                                       | 00  | 0   |     | -             | 4 bits of Ver. Active + 4 bits of Ver. Blanking     |
| 50            |                                       | 00  | 0   |     | 0             | Hor Sync Offset = 0                                 |
| 51            |                                       | 00  | 0   |     | 0             | H Sync Pulse Width = 0                              |
| 52            |                                       | 00  | 0   |     | 0             | V sync Offset = 0 line                              |
| 53            |                                       | 00  | 0   |     | 0             | V Sync Pulse width : 0 line                         |
| 54            |                                       | 00  | 0   |     | 0             | Horizontal Image Size = 0 mm (Low 8 bits)           |
| 55            |                                       | 00  | 0   |     | 0             | Vertical Image Size = 0 mm (Low 8 bits)             |
| 56            |                                       | 00  | 0   |     | -             | 4 bits of Hor Image Size + 4 bits of Ver Image Size |
| 57            |                                       | 00  | 0   |     | 0             | Hor Border (pixels)                                 |
| 58            |                                       | 00  | 0   |     | 0             | Vertical Border (Lines)                             |
| 59            |                                       | 00  | 0   |     |               |                                                     |
| 5A            | Detailed timing/monitor descriptor #3 | 00  | 0   |     |               | ASCII Data Sting Tag                                |
| 5B            |                                       | 00  | 0   |     |               |                                                     |
| 5C            |                                       | 00  | 0   |     |               |                                                     |
| 5D            |                                       | FE  | 254 |     |               |                                                     |
| 5E            |                                       | 00  | 0   |     |               |                                                     |
| 5F            |                                       | 42  | 66  |     | B             | Manufacture name : BOEHF                            |
| 60            |                                       | 4F  | 79  |     | O             |                                                     |
| 61            |                                       | 45  | 69  |     | E             |                                                     |
| 62            |                                       | 20  | 32  |     |               |                                                     |
| 63            |                                       | 48  | 72  |     | H             |                                                     |
| 64            |                                       | 46  | 70  |     | F             |                                                     |
| 65            |                                       | 0A  | 10  |     |               |                                                     |
| 66            |                                       | 20  | 32  |     |               |                                                     |
| 67            |                                       | 20  | 32  |     |               |                                                     |
| 68            |                                       | 20  | 32  |     |               |                                                     |
| 69            |                                       | 20  | 32  |     |               |                                                     |
| 6A            |                                       | 20  | 32  |     |               |                                                     |
| 6B            |                                       | 20  | 32  |     |               |                                                     |



|              |                                                               |     |                  |
|--------------|---------------------------------------------------------------|-----|------------------|
| BOE          | PRODUCT GROUP                                                 | REV | ISSUE DATE       |
|              | TFT- LCD PRODUCT                                              | P0  | 2016.11.3        |
| SPEC. NUMBER | SPEC. TITLE<br>NV156FHM-N46 Preliminary Product Specification |     | PAGE<br>33 OF 33 |

| Address (HEX) | Function                              | Hex | Dec | crc | Input values. | Notes                     |
|---------------|---------------------------------------|-----|-----|-----|---------------|---------------------------|
| 6C            | Detailed timing/monitor descriptor #4 | 00  | 0   |     |               | Product Name Tag (ASCII)  |
| 6D            |                                       | 00  | 0   |     |               |                           |
| 6E            |                                       | 00  | 0   |     |               |                           |
| 6F            |                                       | FE  | 254 |     |               |                           |
| 70            |                                       | 00  | 0   |     |               |                           |
| 71            |                                       | 4E  | 78  |     | N             | Model name : NV156FHM-N46 |
| 72            |                                       | 56  | 86  |     | V             |                           |
| 73            |                                       | 31  | 49  |     | 1             |                           |
| 74            |                                       | 35  | 53  |     | 5             |                           |
| 75            |                                       | 36  | 54  |     | 6             |                           |
| 76            |                                       | 46  | 70  |     | F             |                           |
| 77            |                                       | 48  | 72  |     | H             |                           |
| 78            |                                       | 4D  | 77  |     | M             |                           |
| 79            |                                       | 2D  | 45  |     | -             |                           |
| 7A            |                                       | 4E  | 78  |     | N             |                           |
| 7B            |                                       | 34  | 52  |     | 4             |                           |
| 7C            |                                       | 36  | 54  |     | 6             |                           |
| 7D            |                                       | 0A  | 10  |     |               |                           |
| 7E            | Extension flag                        | 00  | 0   |     |               |                           |
| 7F            | Checksum                              | 82  | 130 | 130 | -             |                           |