

Product Specification

**SPECIFICATION
FOR
APPROVAL**

() Preliminary Specification
() Final Specification

Title	15.4" WSXGA+ TFT LCD
-------	----------------------

BUYER	
MODEL	

SUPPLIER	LG.Philips LCD CO., Ltd.
*MODEL	LP154W02
SUFFIX	TL10

*When you obtain standard approval,
please use the above model name without suffix

SIGNATURE	DATE
_____ / _____	_____
_____ / _____	_____
_____ / _____	_____
Please return 1 copy for your confirmation with your signature and comments.	

APPROVED BY	DATE
S.C. YOON/ S.Manager	_____
REVIEWED BY	
Y.S. HA / Manager	_____
PREPARED BY	
S.H. Jang/ Engineer	_____
Product Engineering Dept. LG. Philips LCD Co., Ltd	

Product Specification

NO.	ITEM	Page
-	COVER	1
-	CONTENTS	2
-	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTIONS	8
3-3	SIGNAL TIMING SPECIFICATIONS	10
3-4	SIGNAL TIMING WAVEFORMS	11
3-5	COLOR INPUT DATA REFERENCE	12
3-6	POWER SEQUENCE	13
4	OPTICAL SPECIFICATIONS	14
5	MECHANICAL CHARACTERISTICS	18
6	RELIABILITY	23
7	INTERNATIONAL STANDARDS	24
7-1	SAFETY	24
7-2	EMC	24
8	PACKING	25
8-1	DESIGNATION OF LOT MARK	25
8-2	PACKING FORM	25
8-3	LABEL INFORMATION	26
9	PRECAUTIONS	27

Product Specification**RECORDS OF REVISIONS**

Revision No	Revision Date	Page	Description	EDID ver
0.1	April..27.2007		First	0.0
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....


Product Specification

1. General Description

The LP154W02 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp(CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 15.4 inches diagonally measured active display area with WSXGA+ resolution(1680 vertical by 1050 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP154W02 has been designed to apply the interface method that enables low power, high speed, low EMI. Flat Link must be used as a LVDS(Low Voltage Differential Signaling) chip.

The LP154W02 is intended to support applications where thin thickness, low power are critical factors and graphic display are important. In combination with the vertical arrangement of the sub-pixels, the LP154W02 characteristics provide an excellent flat display for office automation products such as Notebook PC.

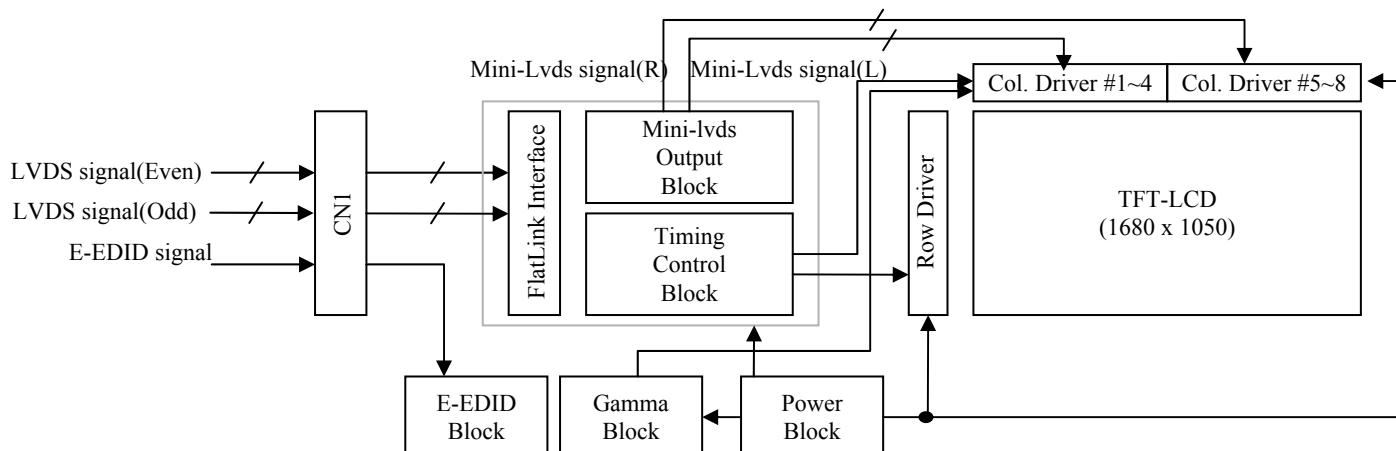

General Features

Active screen size	15.4 inches diagonal
Outline Dimension	344.0(H)[typ.] x 222.0(V)[typ.] x 6.5(D) mm[Max.]
Pixel Pitch	0.19725 mm x 0.19725mm
Pixel format	1680 horiz. By 1050 vert. Pixels RGB stripes arrangement
Color depth	6-bit, 262,144 colors
Luminance, white	200nit(Center 1point)
Power Consumption	5.92W (Typ.) @ LCM circuit 1.75 Watt(Typ.), B/L input 4.17 Watt(Typ.)
Weight	550g (Typ), 565(Max)
Display operating mode	Transmissive mode, normally white
Surface treatments	Hard coating 2H,Anti-glare,Anti-reflection,Anti-electrostatic treatment of the front polarizer (Nitto Denko AG ARC 150T)
RoHS Comply panel	Yes

Product Specification

2. Absolute Maximum Ratings


The following are maximum values which, if exceeded, may cause operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	symbol	Values		Units	Notes
		Min.	Max.		
Power Input Voltage	V_{CC}	-0.3	4.0	Vdc	At $25 \pm 5^\circ\text{C}$
Operating Temperature	T_{OP}	0	50	$^\circ\text{C}$	1
Storage Temperature	T_{ST}	-20	60	$^\circ\text{C}$	1
Operating Ambient Humidity	H_{OP}	10	90	%RH	1
Storage Humidity	H_{ST}	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C Max, and no condensation of water.

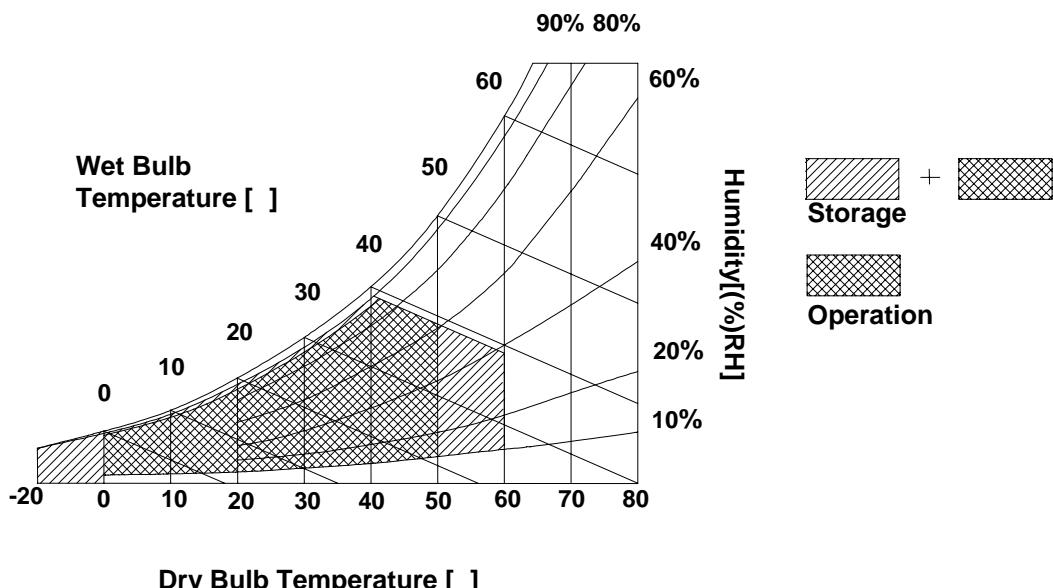

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

The LP154W02 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Units	Notes
		Min.	Typ.	Max.		
MODULE						
Power Supply Input Voltage	V _{CC}	3.0	3.3	3.6	Vdc	
Power Supply Input Current	I _{CC}	-	530	610	mA	1
Differential Impedance	Z _m	90	100	110	ohm	2
Power Consumption	P _C		1.75	2.01	Watts	1
LAMP						
Operating Voltage	V _{BL}	680	695	835	V _{RMS}	3
Operating Current	I _{BL}	3.0	6.0	6.5	mA	
Established Starting Voltage at 25 °C	V _S	-	-	1170	V _{RMS}	4
at 0 °C		-	-	1400	V _{RMS}	
Operating Frequency	f _{BL}	40	60	80	kHz	5
Discharge Stabilization Time	T _S			3	Minutes	6
Power Consumption	P _{BL}	-	4.17	4.42	Watts	7
Life Time		12,000	-	-	Hrs	8

Note : **The design of the inverter must have specification for the lamp in LCD Assembly.**

The performance of the Lamp in LCM, for example life time or brightness, is extremely influenced by the characteristics of the DC-AC inverter. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter.


When you design or order the inverter, please make sure unwanted lighting caused by the mismatch of the lamp and the inverter(no lighting, flicker, etc) never occurs. When you confirm it, the LCD Assembly should be operated in the same condition as installed in your instrument.

1. The specified typical current and power consumption are under the V_{CC}=3.3V, 25°C, f_V=60Hz condition whereas window XP Bliss pattern is displayed and f_V is the frame frequency.
2. This impedance value is needed to proper display and measured from LVDS T_X to the mating connector.
3. The variance of the voltage is ± 10%.
4. The voltage above V_S should be applied to the lamps for more than 1 second for start-up.
Otherwise, the lamps may not be turned on.

Product Specification

5. The output of the inverter must have symmetrical(negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave.
Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
6. It is defined the brightness of the lamp after being lighted for 5 minutes as 100%.
 T_S is the time required for the brightness of the center of the lamp to be not less than 95%.
7. The lamp power consumption shown above does not include loss of external inverter.
The used lamp current is the lamp typical current.
8. The life is determined as the time at which brightness of the lamp is 50% compared to that of initial value at the typical lamp current on condition of continuous operating at $25 \pm 2^\circ\text{C}$.
9. Do not attach a conducting tape to lamp connecting wire.
If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.
10. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.
It shall help increase the lamp lifetime and reduce leakage current.
 - a. The asymmetry rate of the inverter waveform should be less than 10%.
 - b. The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.

* Inverter output waveform had better be more similar to ideal sine wave.

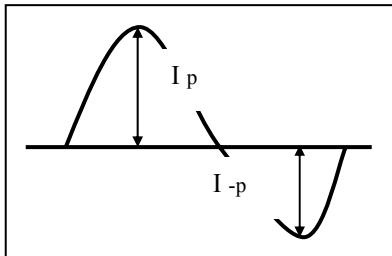

* Asymmetry rate:

$$| I_p - I_{-p} | / I_{rms} * 100\%$$

* Distortion rate

$$I_p (\text{or } I_{-p}) / I_{rms}$$

Product Specification

3-2. Interface Connections

Interface chip must be used FlatLink, part No. THC63LVDF823A(Transmitter made by Thine Inc or equivalence.)


This LCD employs two interface connections, a 30-pin-connector is used for the module electronics and the other connector is used for the integral backlight system.

The electronics interface connector is a model FI-XB30SR-HF11 manufactured by JAE.

The pin configuration for the connector is shown in the table below.

Table 3. MODULE CONNECTOR PIN CONFIGURATION(LVDS)

Pin	Symbol	Description	Notes
1	GND	Ground	
2	Vcc	Power(3.3V)	
3	Vcc	Power(3.3V)	
4	VEDID	DDC 3.3V Power	
5	NC	No connect	
6	CLKEDID	DDC clock	
7	DATAEDID	DDC data	
8	Odd_A1M	Differential Signal	
9	Odd_A1P	Differential Signal	
10	GND	Ground	
11	Odd_A2M	Differential Signal	
12	Odd_A2P	Differential Signal	
13	GND	Ground	
14	Odd_A3M	Differential Signal	
15	Odd_A3P	Differential Signal	
16	GND	Ground	
17	Odd_CLKM	Differential Signal	
18	Odd_CLKP	Differential Signal	
19	GND	Ground	
20	Even_A1M	Differential Signal	
21	Even_A1P	Differential Signal	
22	GND	Ground	
23	Even_A2M	Differential Signal	
24	Even_A2P	Differential Signal	
25	GND	Ground	
26	Even_A3M	Differential Signal	
27	Even_A3P	Differential Signal	
28	GND	Ground	
29	Even_CLKM	Differential Signal	
30	Even_CLKP	Differential Signal	

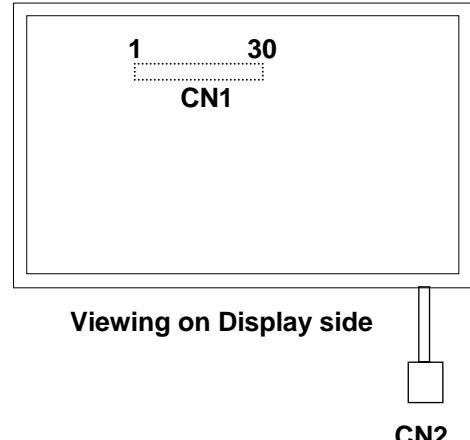

Product Specification

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or equivalent.

The mating connector part number is SM02B-BHSS-1 or equivalent.

The pin configuration for the connector is shown in the table below.

Table 4. BACKLIGHT CONNECTOR PIN CONFIGURATION

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored White. The low voltage side terminal is Yellow.


Product Specification

3-3. Signal Timing Specifications

This is the signal timing required at the input of the LVDS Transmitter. All of the interface signal timing should be satisfied with the following specifications for its proper operation.

Table 6. Timing Table

ITEM		SYMBOL	MIN	TYP.	MAX.	UNIT	NOTES
Dclk	Frequency	f_{CLK}	55	61	67	MHz	
	Width-Low	t_{WCL}	3	-	-	ns	
	Width-High	t_{WCH}	3	-	-	ns	
	Duty	D	0.4	0.5	0.6		$D = t_{CLKH}/t_{CLK}$
Hsync	Period	t_{HP}	864	952	1288	t_{CLK}	
	Width	t_{WH}	8	32	-	t_{CLK}	
Vsync	Period	t_{VP}	1057	1066	1082	t_{HP}	
	Width active	t_{WV}	1	3	-	t_{HP}	
DE	Set up Time	t_{SI}	3	-	-	ns	For Dclk
	Hold Time	t_{HI}	3	-	-		
	Horizontal Back Porch	t_{HBP}	8	64	-	t_{CLK}	
	Horizontal Front Porch	t_{HFP}	8	16	-		
	Vertical Back Porch	t_{VBP}	5	12	-	t_{HP}	
	Vertical Front Porch	t_{VFP}	1	1	-		
DATA	Set up Time	t_{SD}	3	-	-	ns	For Dclk
	Hold Time	t_{HD}	3	-	-		
Input Voltage	High	t_{RH}	0.7Vcc				
	Low	t_{RL}			0.3Vcc		

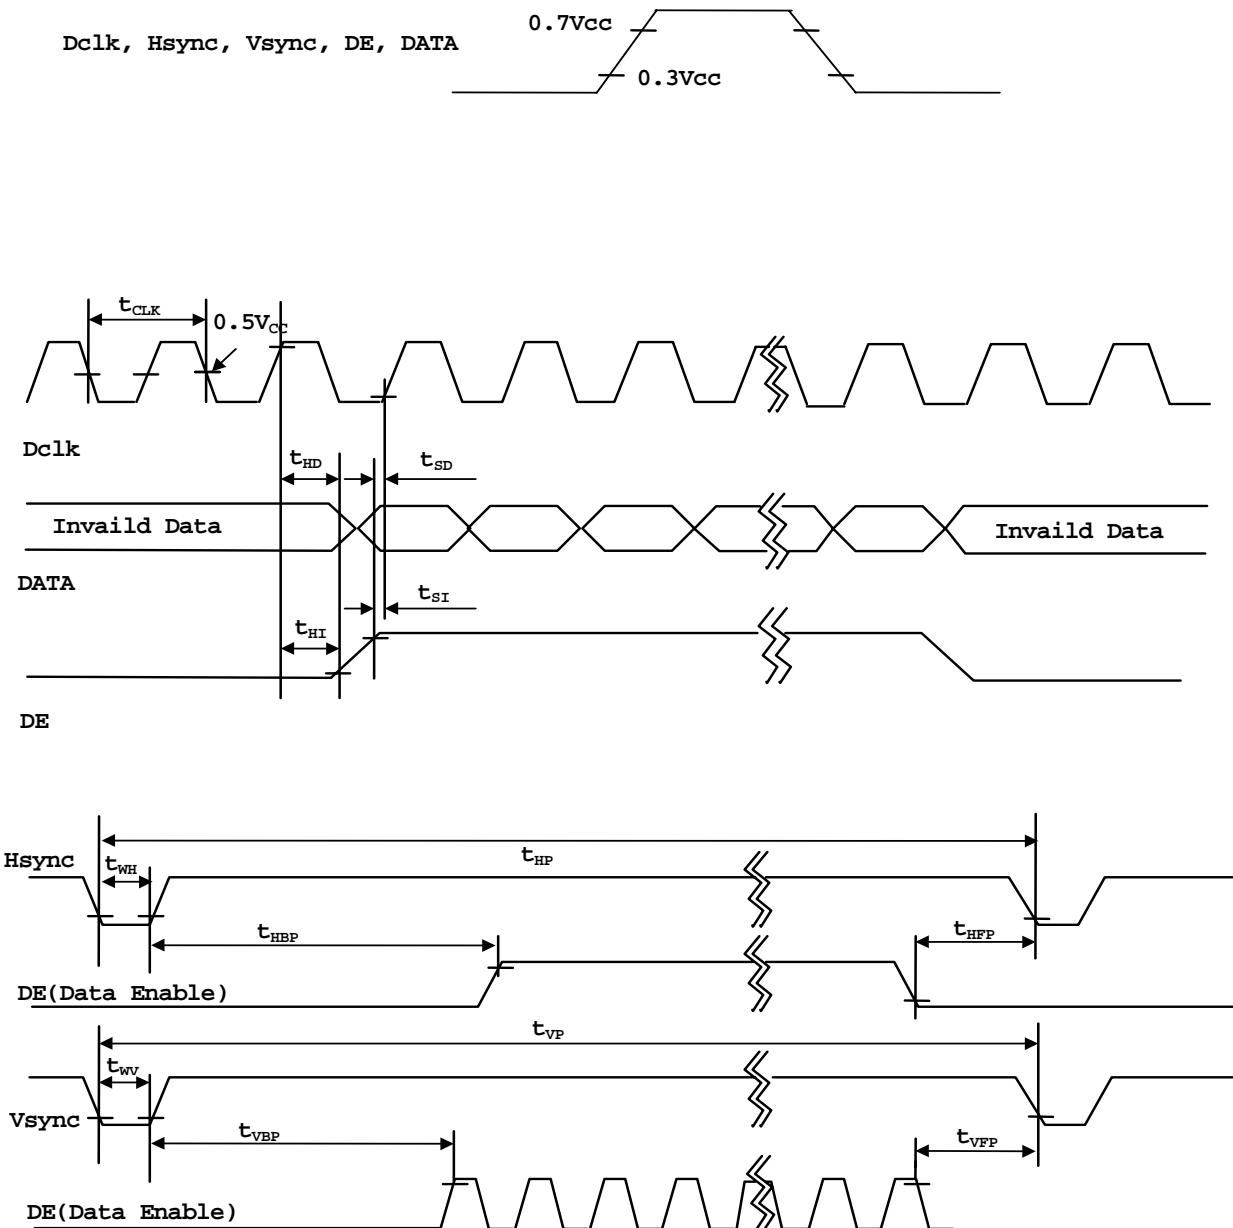
Product Specification
3-4. Signal Timing Waveforms


Product Specification
3-5. Color Input Data Reference

The brightness of each primary color(red,green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

Color		Input Color Data																	
		Red						Green						Blue					
		MSB			LSB			MSB			LSB			MSB			LSB		
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red(00) Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(02)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63) Bright	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Green	Green(00)Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(02)	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green(63)Bright	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Blue	Blue(00) Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(02)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue(63) Bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

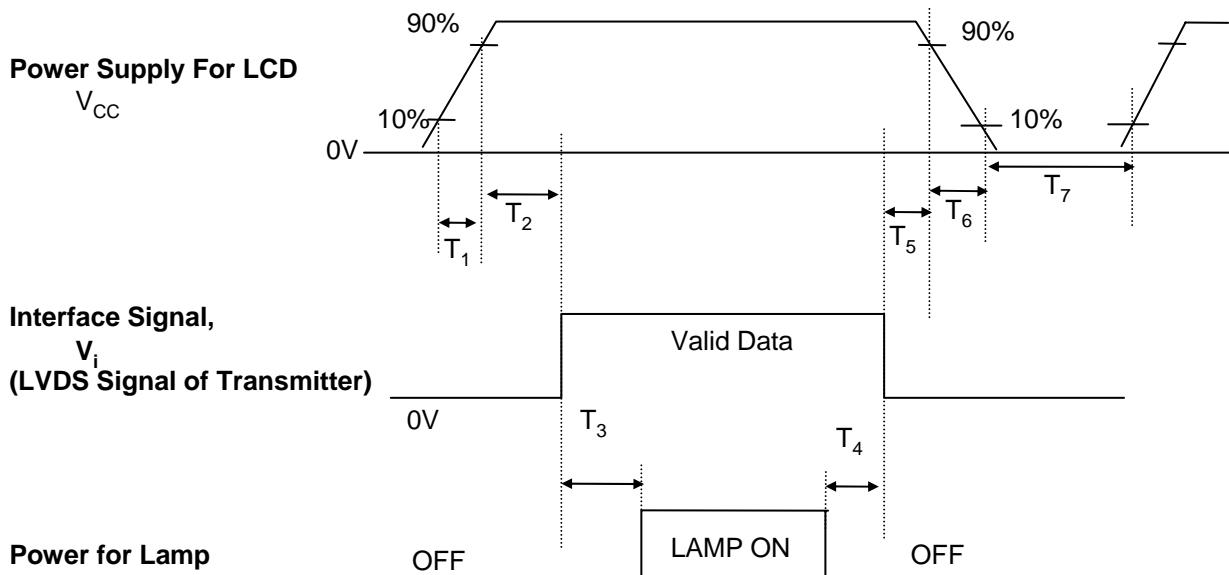Product Specification
3-6. Power Sequence


Parameter	Values			Units
	Min.	Typ.	Max.	
T_1	-	-	10	ms
T_2	0	-	50	ms
T_3	200	-	-	ms
T_4	0	-	-	ms
T_5	0	-	50	ms
T_6	-	-	10	ms
T_7	150	-	-	ms

- Notes :**
1. Please avoid floating state of interface signal at invalid period.
 2. When the interface signal is invalid, be sure to pull down the power supply for LCD V_{CC} to 0V.
 3. Lamp power must be turn on after power supply for LCD and interface signal are valid.


Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25 °C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0 °.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

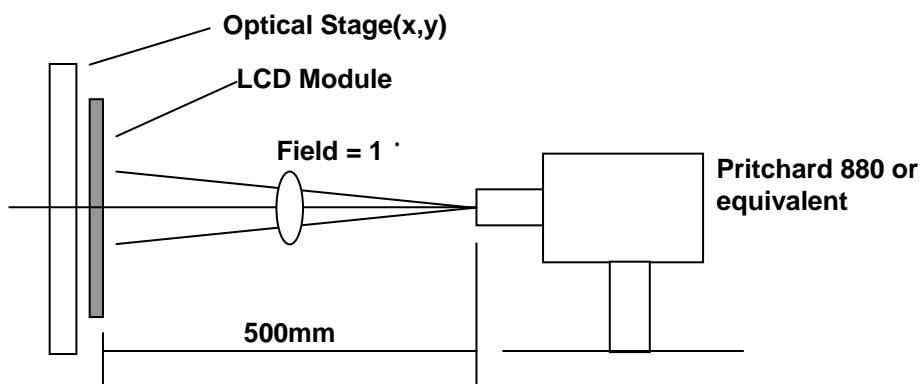

($T_a=25$ °C, $V_{CC}=3.3V$, $f_V=60Hz$
 $Dclk=60.9MHz$, $I_{BL}=6.0mA$)

Table 8. OPTICAL CHARACTERISTICS

Parameter	Symbol	Values			Units	Notes
		Min.	Typ.	Max.		
Contrast Ratio	CR	300	500	-		1
Surface Luminance, white	L_{WH}	170	200	-	cd/m ²	2
Luminance % uniformity	δ_{WHITE}	50	55	-	%	3
Response Time	Tr					4
Rise Time + Decay Time	$Tr_R + Tr_D$	-	25	40	ms	
CIE Color Coordinates						
Red	XR	0.559	0.589	0.619		± 0.03
Green	YR	0.315	0.345	0.375		± 0.03
Blue	XG	0.297	0.327	0.357		± 0.03
White	YG	0.514	0.544	0.574		± 0.03
White	XB	0.127	0.157	0.187		± 0.03
White	YB	0.111	0.141	0.171		± 0.03
White	XW	0.285	0.313	0.341		± 0.028
White	YW	0.309	0.329	0.349		± 0.020
Viewing Angle						
x axis, right($\phi=0$ °)	θ_r	60	65	-		5
x axis, left ($\phi=180$ °)	θ_l	60	65	-		
y axis, up ($\phi=90$ °)	θ_u	40	50	-	degree	
y axis, down ($\phi=270$ °)	θ_d	50	50	-		
Gray Scale	-	-	2.2	-		6

Product Specification

Notes : 1. Contrast Ratio(CR) is defined mathematically as :

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the center point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 2.

When $I_{BL} = 6.0\text{mA}$,

3. Luminance % uniformity is measured for 13 point For more information see FIG 2.
 $\text{WHITE} = (\text{Minimum(LN1,LN2, LN13)} / \text{Maximum(LN1,LN2, LN13)}) \times 100\%$

4. Response time is the time required for the display to transition from white to black(Rise Time, T_{rR}) and from black to white(Decay Time, T_{rD}). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification

* $f_V=60\text{Hz}$

Gray Level	Luminance(%) (Typ.)
L0	0.0
L7	1.0
L15	5.0
L23	12.0
L31	21.0
L39	35.0
L47	52.0
L55	74.0
L63	100

Product Specification

FIG. 2 Luminance


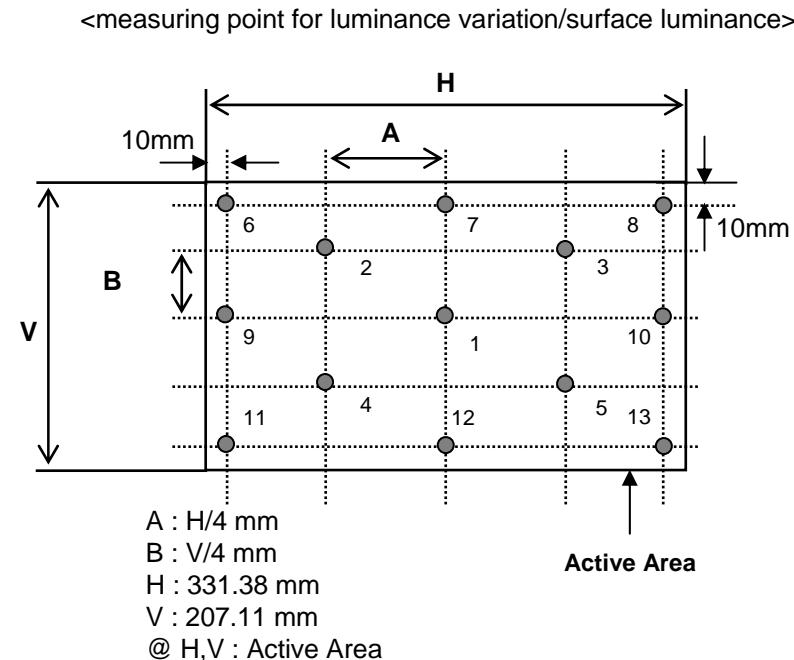


FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".




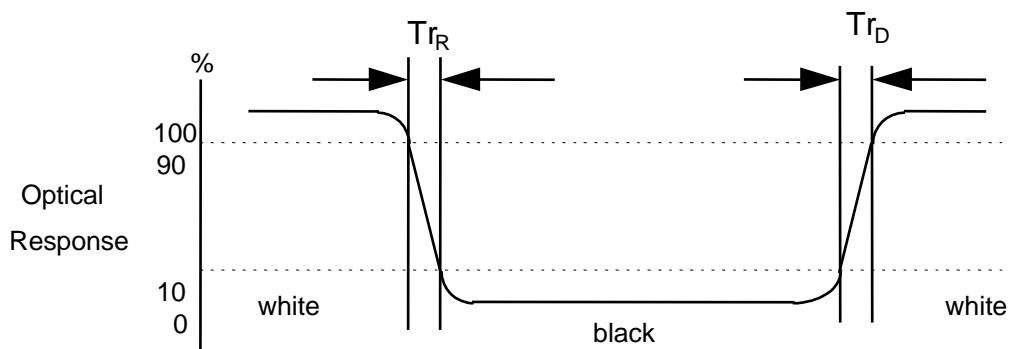

Product Specification

FIG. 4 Viewing angle

<dimension of viewing angle range>

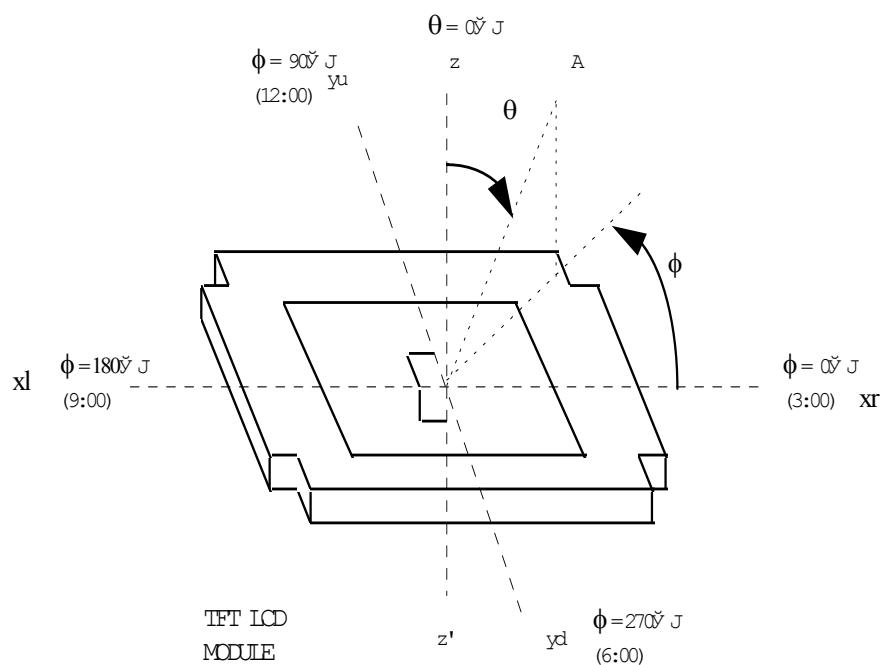

A : Eye of Observer

Product Specification

5. Mechanical Characteristics


The contents provide general mechanical characteristics for the model LP154W02. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outside dimensions	Horizontal	344.0 ± 0.5mm
	Vertical	222.0 ± 0.5mm
	Depth	6.2.(Typ), 6.5.(Max)
Bezel area	Horizontal	335.0 ± 0.5mm
	Vertical	210.7 ± 0.5mm
Active display area	Horizontal	331.38mm
	Vertical	207.11mm
Weight(approximate)	565g(Max)	
Surface Treatment	Hard coating 2H,Anti-glare,Anti-reflection, Anti-electrostatic treatment of the front polarizer (Nitto Denko AG ARC 150T)	

Product Specification

<FRONT VIEW>


Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

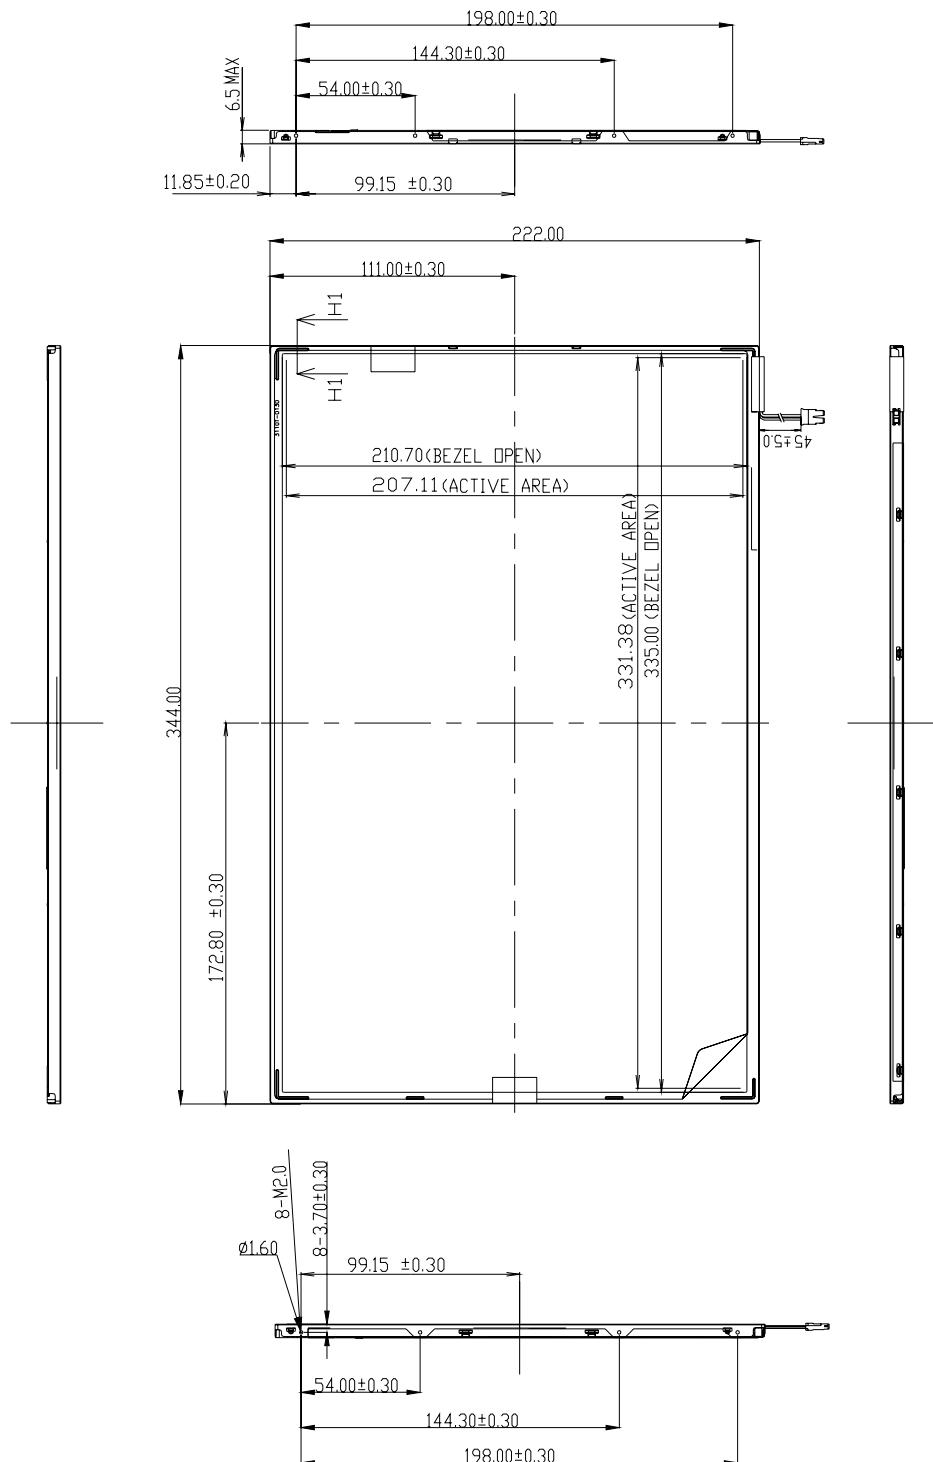


Product Specification

<REAR VIEW>

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

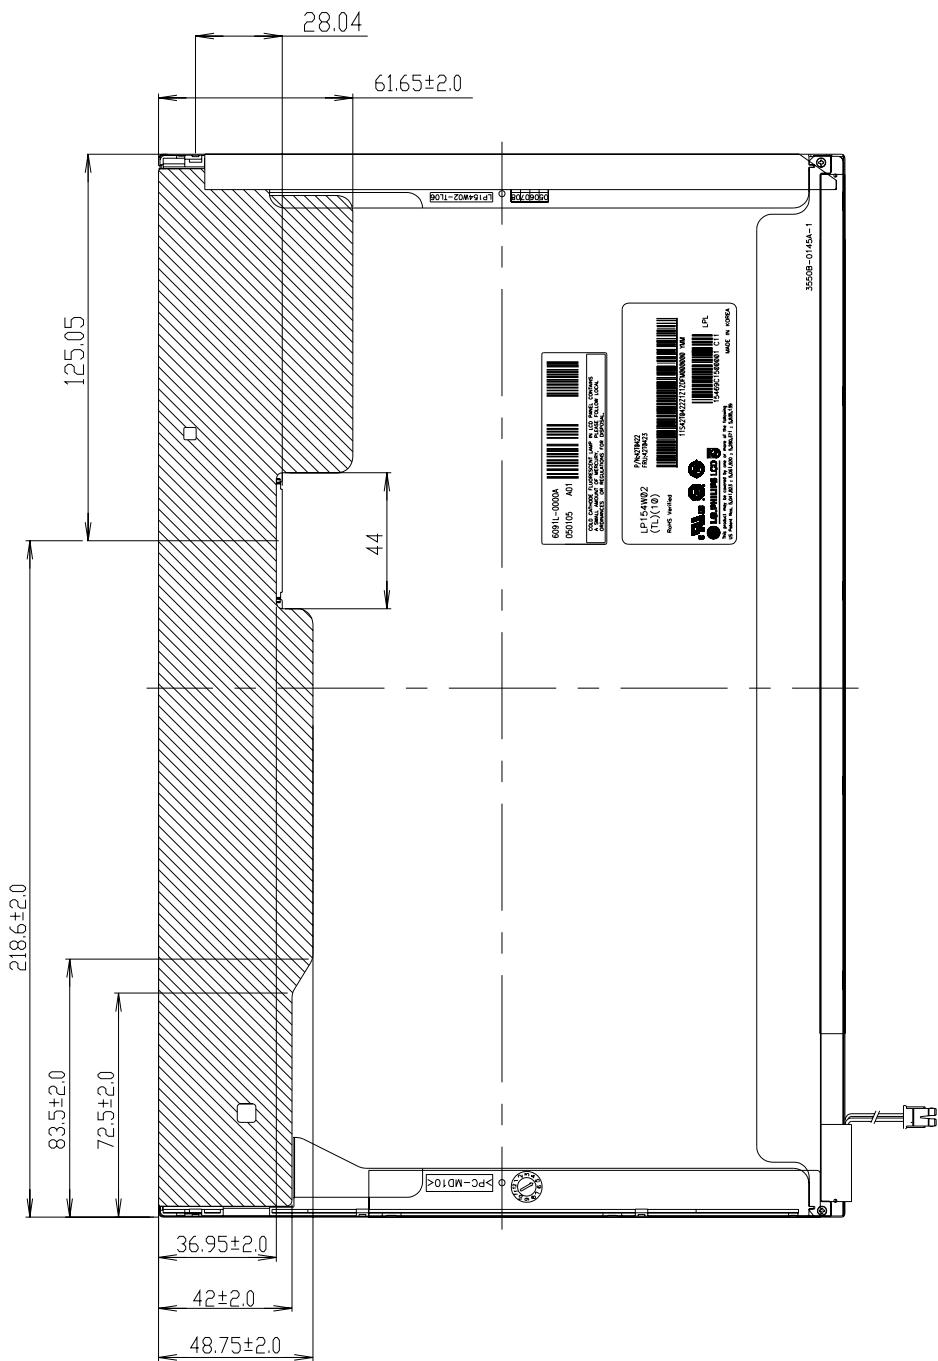


Product Specification

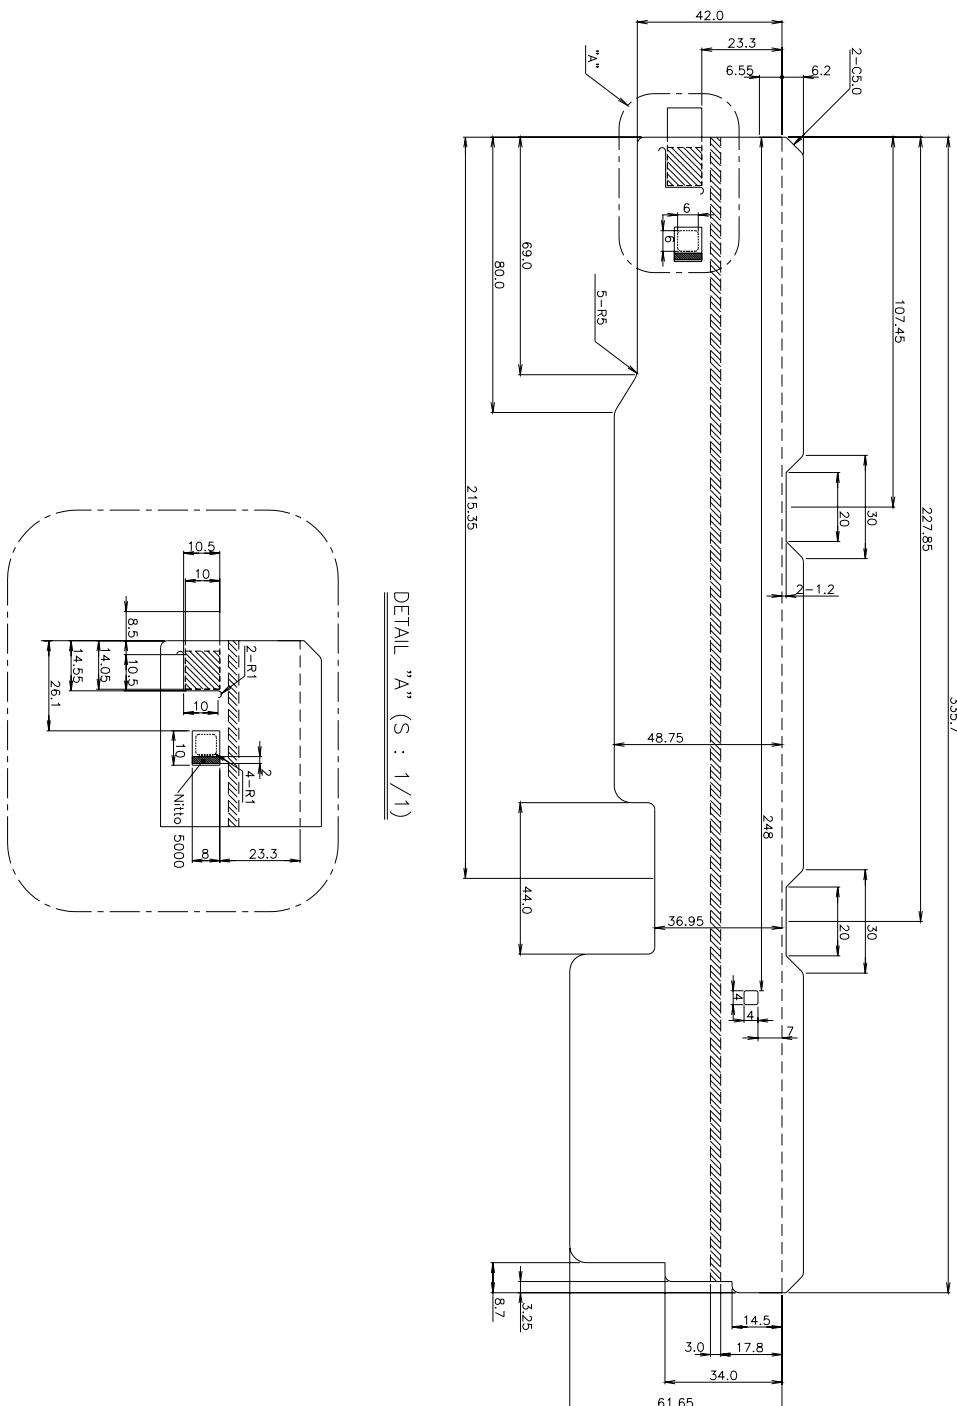

Product Specification

[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

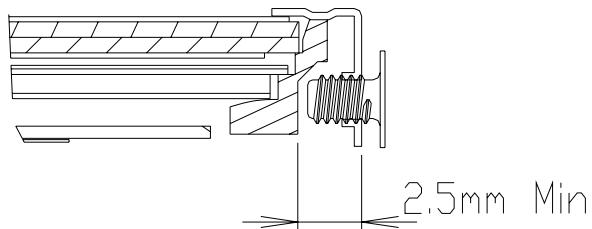

- *SCREW(8EA) TORQUE : 2.5kgf.cm max
- *Screw Hole Depth : 2.5mm min
- *Screw Length : max 2.5, min2.0

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 5 ~ 150Hz, 1.5G, 0.37oct/min 3 axis, 30min/axis
6	Shock test (non-operating)	- No functional or cosmetic defects following a shock to all 6 sides delivering at least 180 G in a half sine pulse no longer than 2 ms to the display module - No functional defects following a shock delivering at least 200 g in a half sine pulse no longer than 2 ms to each of 6 sides. Each of the 6 sides will be shock tested with one each display, for a total of 6 displays
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

Product Specification

7. International Standards

7-1. Safety

- a) UL 60950-1:2003, First Edition, Underwriters Laboratories, Inc., Standard for Safety of Information Technology Equipment.
- b) CAN/CSA C22.2, No. 60950-1-03 1st Ed. April 1, 2003, Canadian Standards Association, Standard for Safety of Information Technology Equipment.
- c) EN 60950-1:2001, First Edition, European Committee for Electrotechnical Standardization(CENELEC) European Standard for Safety of Information Technology Equipment.

7-2. EMC

- a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz." American National Standards Institute(ANSI), 1992
- b) C.I.S.P.R. "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
- c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998 (Including A1: 2000)

Product Specification

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
 This is subject to change without prior notice.


8-2. Packing Form

a) Package quantity in one box : 10 pcs

b) Box Size : 441mm .373mm .348mm

Product Specification

8-3. Label Description

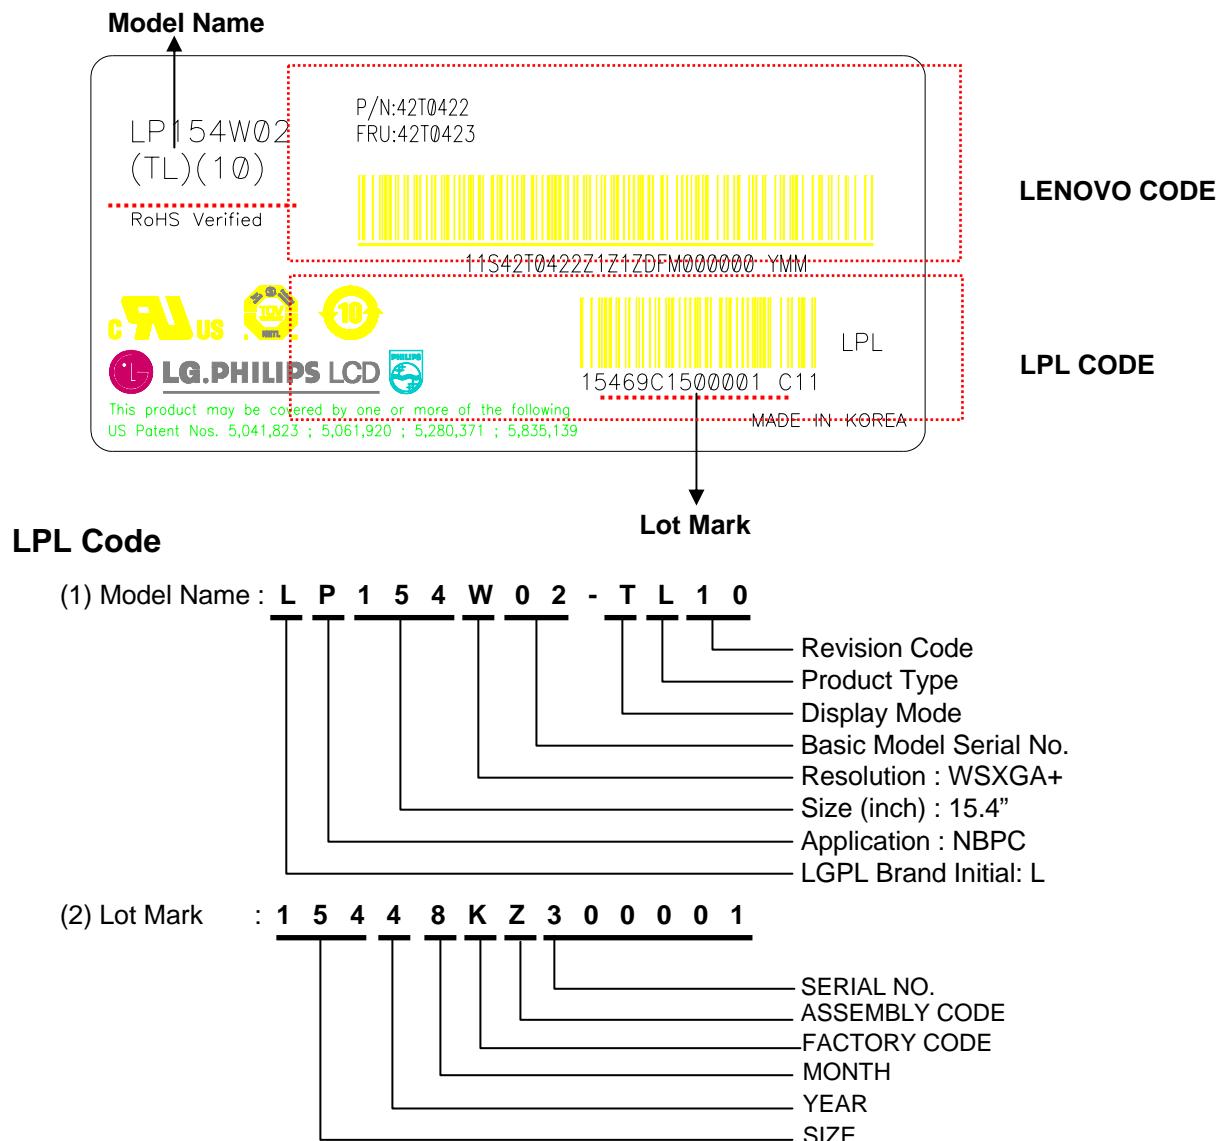

LENOVO Code

1) LENOVO P/N : 42T0422

2) FRU P/N : 42T0423

Product Specification

9. PRECAUTIONS

Please pay attention to the following when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force(ex. Twisted stress) is not applied to the module.
And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach a transparent protective plate to the surface in order to protect the polarizer.
Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not described because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are determined to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage : $V= \pm 200mV$ (Over and under shoot voltage)
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

Product Specification

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer.
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

LP154W02-TL10 E-EDD(BF) DATA (Ver 0.0) '070306				LG LP154W02	2007-03-06
Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)	Value (binary)	Data
0	0	Header	0	0 0000 0000	Header
1	1	Header	F	1111 1111	
2	2	Header	F	1111 1111	
3	3	Header	F	1111 1111	
4	4	Header	F	1111 1111	
5	5	Header	F	1111 1111	
6	6	Header	F	1111 1111	
7	7	Header	0	0 0000 0000	
8	8	D system ManufacturerName	2 4	0010 0100	Vender/ Product ID
9	9	Compressed ASC II	4 D	0100 1101	
10	0A	D ProductCode	8 7	1000 0111	
11	0B	D ProductCode	2 8	0010 1000	
12	0C	LCD Module SerialNo.= 0 (Ifnotused)	0 0	0000 0000	
13	0D	LCD Module SerialNo.= 0 (Ifnotused)	0 0	0000 0000	
14	0E	LCD Module SerialNo.= 0 (Ifnotused)	0 0	0000 0000	
15	0F	LCD Module SerialNo.= 0 (Ifnotused)	0 0	0000 0000	
16	10	Week of M anufacture	0 0	0000 0000	0
17	11	Year of M anufacture	0 F	0000 1111	2005
18	12	EDD Structure version	0 1	0000 0001	1
19	13	EDD Revision	0 3	0000 0011	3
20	14	Video InputDefinition = Digital/P, non TMDS CRGB	8 0	1000 0000	Display Parameter
21	15	Max H image size (□) = 33.12	2 1	0010 0001	
22	16	Max V image size (□) = 20.70	1 5	0001 0101	
23	17	Display gamma	7 8	0111 1000	
24	18	Feature support(DPM S) = Active off, RGB Color	0 A	0000 1010	
25	19	Red/Green low Bits	B C	1011 1100	
26	1A	Blue/White Low Bits	A 5	1010 0101	
27	1B	Red X	9 8	1001 1000	0.595
28	1C	Red Y	5 8	0101 1000	0.345
29	1D	Green X	5 5	0101 0101	0.332
30	1E	Green Y	8 B	1000 1011	0.544
31	1F	Blue X	2 8	0010 1000	0.157
32	20	Blue Y	2 4	0010 0100	0.141
33	21	White X	5 0	0101 0000	0.313
34	22	White Y	5 4	0101 0100	0.329
35	23	Established Timing I= 00h (Ifnotused)	0 0	0000 0000	Established Timings
36	24	Established Timing II= 00h (Ifnotused)	0 0	0000 0000	
37	25	Manufacturer's Timings = 00h (Ifnotused)	0 0	0000 0000	
38	26	Standard Timing Identification 1 was not used	0 1	0000 0001	
39	27	Standard Timing Identification 1 was not used	0 1	0000 0001	
40	28	Standard Timing Identification 2 was not used	0 1	0000 0001	
41	29	Standard Timing Identification 2 was not used	0 1	0000 0001	
42	2A	Standard Timing Identification 3 was not used	0 1	0000 0001	Standard Timing ID
43	2B	Standard Timing Identification 3 was not used	0 1	0000 0001	
44	2C	Standard Timing Identification 4 was not used	0 1	0000 0001	
45	2D	Standard Timing Identification 4 was not used	0 1	0000 0001	
46	2E	Standard Timing Identification 5 was not used	0 1	0000 0001	
47	2F	Standard Timing Identification 5 was not used	0 1	0000 0001	
48	30	Standard Timing Identification 6 was not used	0 1	0000 0001	
49	31	Standard Timing Identification 6 was not used	0 1	0000 0001	
50	32	Standard Timing Identification 7 was not used	0 1	0000 0001	
51	33	Standard Timing Identification 7 was not used	0 1	0000 0001	
52	34	Standard Timing Identification 8 was not used	0 1	0000 0001	
53	35	Standard Timing Identification 8 was not used	0 1	0000 0001	

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

54	36	PixelClock/10,000 (LSB)	1	C	0001 1100	120.6M hz	Timing Descriptor #1
55	37	PixelClock/10,000 (MSB) / 59.98Hz	2	F	0010 1111		
56	38	HorizontalActive	9	0	1001 0000	1680 pixels	
57	39	HorizontalBlanking	D	0	1101 0000	208 pixels	
58	3A	HorizontalActive : HorizontalBlanking	6	0	0110 0000		
59	3B	VerticalActive	1	A	0001 1010	1050 lines	
60	3C	VerticalBlanking	0	F	0000 1111	15 lines	
61	3D	VerticalActive : VerticalBlanking	4	0	0100 0000		
62	3E	HorizontalSync Offset	2	0	0010 0000	32 pixels	
63	3F	HorizontalSync Pulse Width	3	0	0011 0000	48 pixels	
64	40	VerticalSync Offset : Sync Width	1	3	0001 0011	1/3 lines	Timing Descriptor #2
65	41	HorizontalVertical Sync Offset/Width upper 2bits = 0	0	0	0000 0000	0	
66	42	HorizontalImage Size = 331.2 mm	4	B	0100 1011	331	
67	43	VerticalImage Size = 207.0mm	C	F	1100 1111	207	
68	44	Horizontal& VerticalImage Size	1	0	0001 0000		
69	45	HorizontalBorder=0	0	0	0000 0000		
70	46	VerticalBorder=0	0	0	0000 0000		
71	47	Non-interlaced,Nom aldisplay,no stereo,Digitalseparate sync,H/V polnegatives	1	9	0001 1001		
72	48	PixelClock/10,000 (LSB) 50Hz	4	5	0100 0101	100.536	
73	49	PixelClock/10,000 (MSB) / 50Hz	2	7	0010 0111		
74	4A	HorizontalActive	9	0	1001 0000	1680 pixels	Timing Descriptor #3
75	4B	HorizontalBlanking	D	0	1101 0000	208 pixels	
76	4C	HorizontalActive : HorizontalBlanking	6	0	0110 0000		
77	4D	VerticalActive	1	A	0001 1010	1050 lines	
78	4E	VerticalBlanking	0	F	0000 1111	15 lines	
79	4F	VerticalActive : VerticalBlanking	4	0	0100 0000		
80	50	HorizontalSync Offset	2	0	0010 0000	32 pixels	
81	51	HorizontalSync Pulse Width	3	0	0011 0000	48 pixels	
82	52	VerticalSync Offset : Sync Width	1	3	0001 0011	1/3 lines	
83	53	HorizontalVertical Sync Offset/Width upper 2bits = 0	0	0	0000 0000	0	
84	54	HorizontalImage Size = 331.2 mm	4	B	0100 1011	331	
85	55	VerticalImage Size = 207.0mm	C	F	1100 1111	207	Timing Descriptor #3
86	56	Horizontal& VerticalImage Size	1	0	0001 0000		
87	57	HorizontalBorder=0	0	0	0000 0000		
88	58	VerticalBorder=0	0	0	0000 0000		
89	59	Non-interlaced,Nom aldisplay,no stereo,Digitalseparate sync,H/V polnegatives	1	9	0001 1001		
90	5A	Detailed Timing Descriptor#3	0	0	0000 0000	0	
91	5B		0	0	0000 0000	0	
92	5C		0	0	0000 0000	0	
93	5D		0	F	0000 1111	15	
94	5E		0	0	0000 0000	0	
95	5F	(Horizontalactive pixel/8)-31	B	3	1011 0011	179	Timing Descriptor #3
96	60	Image AspectRatio (16:10)	0	A	0000 1010	16 : 10	
97	61	Low Refresh Rate #1(50Hz)	3	2	0011 0010	50	
98	62	(Horizontalactive pixel/8)-31	B	3	1011 0011	179	
99	63	Image AspectRatio (16:10)	0	A	0000 1010	16 : 10	
100	64	Low Refresh Rate #2(40Hz)	2	8	0010 1000	40	
101	65	Brightness (1/10nib)	1	4	0001 0100	20	
102	66	Feature flag(TN mode)	0	1	0000 0001	1	
103	67	Reserved 00h	0	0	0000 0000	0	
104	68	EIA manufacturer code (3 Character ID)	3	2	0011 0010	LPL	
105	69	Compressed ASCII	0	C	0000 1100		
106	6A	PanelSupplierReserved - Productcode	0	0	0000 0000		
107	6B	(Hex, LSB first)	0	0	0000 0000		

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

108	6C	Detailed Timing Descriptor#4	0	0	0000 0000						
109	6D		0	0	0000 0000						
110	6E		0	0	0000 0000						
111	6F		F	E	1111 1110						
112	70		0	0	0000 0000						
113	71	(SupplierS/N)	4	C	0100 1100	L					
114	72	(SupplierS/N)	5	0	0101 0000	P					
115	73	(SupplierS/N)	3	1	0011 0001	1					
116	74	(SupplierS/N)	3	5	0011 0101	5					
117	75	(SupplierS/N)	3	4	0011 0100	4					
118	76	(SupplierS/N)	5	7	0101 0111	W					
119	77	(SupplierS/N)	3	0	0011 0000	0					
120	78	(SupplierS/N)	3	2	0011 0010	2					
121	79	(SupplierS/N)	2	D	0010 1101	-					
122	7A	(SupplierS/N)	5	4	0101 0100	T					
123	7B	(SupplierS/N)	4	C	0100 1100	L					
124	7C	(SupplierS/N)	3	0	0011 0000	0					
125	7D	(SupplierS/N)	3	6	0011 0110	6					
126	7E	Extension flag = 00	0	0	0000 0000						Extension Flag
127	7F	Checksum	B	F	1011 1111						Checksum

Product Specification

APPENDIX B. Special Statements for LP154W02 of Lenovo's Notebook


1. Maximum Leakage Current of CCFL

The lamp leakage current is measured by the current difference between input and output current, whereas the output current is set at 6.0 mA.

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
Maximum Leakage Current	I_L			1.2	1.7	mA

2. Minimum CCFL Current

In case of inverter using PWM (Pulse Width Modulation) dimming control method, the duty ratio will be varied from 100%(maximum brightness) to 15%(minimum brightness). CCFL will work form 15% to 100% duty ratio without any problems including specified CCFL reliability when any requirements for CCFL are observed at the whole specified range of duty ratio. The duty ratio is defined as follows,

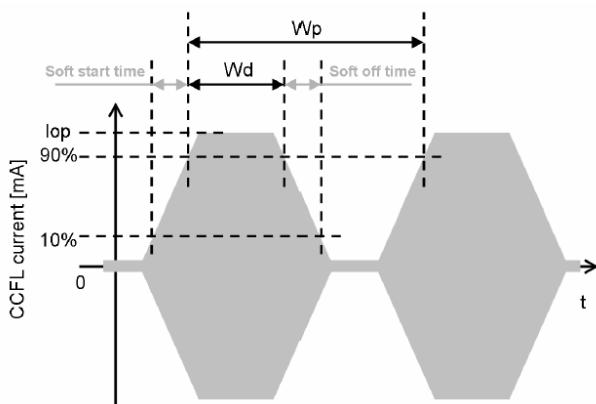

15% . Duty ratio.100%

$$\text{Duty ratio[%]} = \frac{Wd}{Wp} \times 100$$

Duty ration does not include soft start time / soft off time.

Where:

Wd : Duty time [msec]

Wp : Width of PWM frequency [msec]

Iop : Peak current at maximum brightness [mA]

3. Refresh Rate for Power Saving Mode

In this documentation, all reliabilities are specified for timing specification based on refresh rate of 60Hz. However, LP154W02 has a good actual performance even at lower refresh rate(eg. 40Hz or 50Hz) for power saving mode, whereas LP154W02 is secured only for function under lower refresh rate. 60Hz at Normal mode, 50Hz ,40 Hz at Power save mode. Don't care Flicker level (power save mode).

4. Power Sequence for T4 and T7

In this documentation, power sequence is specified differently compared with LPL's standard power sequence. LP154W02 is believed that there is no problem for current power sequence specification. However, LG.Philips LCD always recommends standard power sequence for more stable operation, specially, Min. 200[msec] for T4 and Min. 400[msec] for T7.

5. White Color Shift

White Color shift at 12,000 hours lifetime should be within +0.04 for both x and y from the initial value.